

# Study for Closed Loop Operation of an Adjustable Speed Permanent Magnet Synchronous Motor Drive with Different Controllers

Nazir Akhter<sup>1</sup>, Waseem Ali<sup>2</sup>

<sup>1</sup>Electrical & Electronics Engineering Scholar CIST Bhopal

<sup>2</sup>Electrical & Electronics Engineering Department CIST Bhopal

## ABSTRACT

In this paper an extensive comparative study is carried out between PI and PID controlled closed loop model of an adjustable speed Permanent Magnet Synchronous Motor (PMSM) drive. The incorporation of Sinusoidal Pulse Width Modulation (SPWM) strategy establishes near sinusoidal armature phase currents and comparatively less torque ripples without sacrificing torque/weight ratio. In this closed loop model of PMSM drive, the information about reference speed is provided to a speed controller, to ensure that actual drive speed tracks the reference speed with ideally zero steady state speed error. The entire model of PMSM closed loop drive is divided into two loops, inner loop current and outer loop speed. By taking the different combinations of two classical controllers (PI & PID) related with two loop control structure, different approximations are carried out. Hence a typical comparative study is introduced to familiar with the different performance indices of the system corresponding to time domain and frequency domain specifications. Therefore overall performance of closed loop PMSM drive is tested and effectiveness of controllers will be determined for different combinations.

## 1. INTRODUCTION

The Permanent Magnet Synchronous Motor (PMSM) is a rotating electrical machine where the stator is a classic three phase stator like that of an induction motor and the rotor has surface mounted permanent magnets. In this regard, The Permanent Magnet Synchronous Motor is equivalent to an induction motor where the air gap magnetic field is produced by a permanent magnet [1]. Thus with the development of permanent materials and control technology the PMSM is mostly used due to high torque/inertia ratio, high power density, high efficiency, reliability and easy for maintenance in different industrial applications. The schematic block diagram of closed loop model of adjustable speed PMSM drive is represented in Figure 1. This model basically involves development of model of PMSM i.e. for machines having sinusoidal air gap flux distribution. The PMSM, therefore, has a sinusoidal induced emf and require sinusoidal currents to produce constant torque. The rotor position information is very crucial for field oriented control. For widespread industrial applications, such as high performance motor drives, accurate motor speed control is required in which regardless of sudden load changes and parameter variations [2-3]. Hence, the control system must be designed very carefully as it required to ensure the optimum speed operation under the environmental variations, load variations and structural perturbations. In this paper, the model of a complete

closed loop adjustable speed Permanent Magnet Synchronous Motor drive is developed using different combination of classical controllers where a three phase two-level voltage source inverter (VSI) feeds the PMSM armature and the VSI is switched according to a sinusoidal pulse width modulation (SPWM) strategy. Some pulse width modulation (PWM) technique can be employed of the self synchronous VSI feeding the PMSM, so that lower order harmonics can be removed from the harmonic spectrum of the armature currents of the PMSM resulting in lower to q ue ripple .Different combinations of classical controllers such as PI and PID are incorporated in two loop control structure for the determination of various performance indices of a closed loop adjustable speed PMSM drive accordingly [4-5].

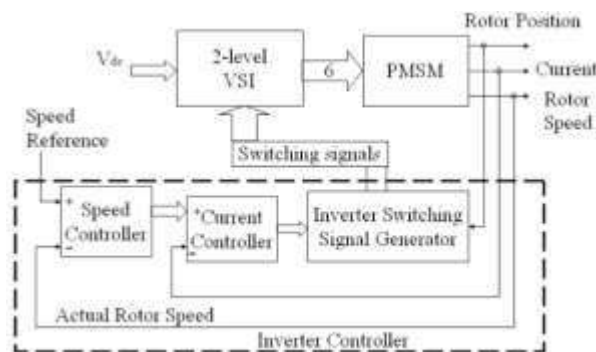


Figure1.Schematic Block Diagram of Closed Loop Model of Adjustable Speed PMSM Drive

## 2. SYSTEM DESCRIPTION

The complete set-up of the developed model has been represented in Figure 2, The system comprising of four (05) necessary components like SPWM based Voltage Source Inverter (VSI), PMSM motor, speed and position sensor, controller (Speed and current) and the mechanical block. Here an absolute position encoder is mounted on the rotor, which is assumed capable of providing the rotor position information at each instant of time. The inverter is assumed powered from the DC side by a constant DC voltage source,  $V_{dc}$  which is not varied. The controller realization starts with the adjustable speed reference, at which the drive is intended to run, irrespective of the load torque variation within a feasible range [6-7]. The information of this reference speed is provided to a speed controller, which is a PI controller in this model in order to track the reference speed [8]. The speed controller output forms the torque or current reference, which is fed to next controller which is the current controller. The current controller output is fed to the block responsible for the generation of the switching signals of the six power electronic devices of the VSI. The speed control arrangement consists of two loop control system with an outer speed loop and inner current loop. The current controller in this case is also a PI controller. It starts with an adjustable speed reference, with which the actual machine speed, obtained by integrating the rotor position information provided by the absolute position encoder is compared [9].

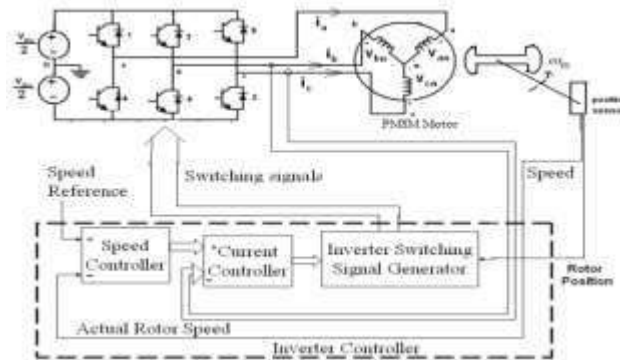


Figure2.The Scheme of the Closed Loop Adjustable-Speed PMSM Drive with the Sinusoidal Pulse Width Modulated Inverter

The Permanent Magnet Synchronous Machine is analyzed on the basis of “D-Q axes rotor reference frame theory” and the control on the machine is exercised by controlling the q-axis component of the armature current.

## 3. DESIGN AND MATHEMATICAL ANALYSIS OF CLOSED LOOP ADJUSTABLE SPEED PMSM DRIVE

The design of the speed controller is important from the point of view of imparting desired transient and steady state characteristics to the speed-controlled PMSM drive system. Selection of gain and time constants of such a controller by using the symmetric-optimum principle is straight forward if the d axis stator current is assumed to be zero [10]. As the closed loop system yields a two loop control structure i.e. outer loop is a speed controller loop and inner loop is a current controller loop.

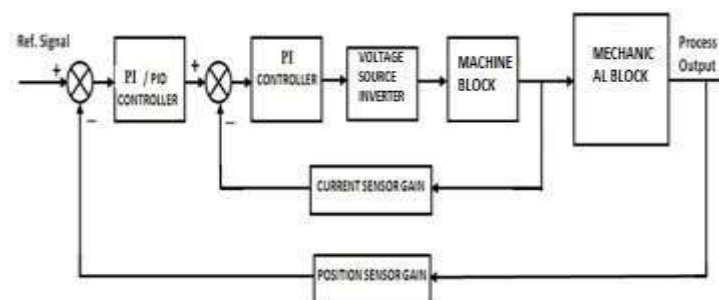


Figure 3. Systematic Block Diagram Representation of a Closed Loop Adjustable Speed PMSM Drive The reset time and gain of

the outer speed PI controller should be critically found out to ensure that the dynamic response of the drive is satisfactory, zero steady state speed error is ensured and the system remains stable. For the closed loop model, block diagram of complete drive system is represented in Figure3. The transfer functions of all the blocks are determined; afterwards the gain and time constants are calculated in order to design the proposed closed loop model of an adjustable speed PMSM drive [11]. The speed PI controller output is treated as the q axis current reference  $i_{qs}$ , which is

responsible for generation of electromagnetic torque, for  $v_{ds}=0$ , as the approximate analysis of the PMSM suggests. This current reference is compared with actual 'q'-component of armature current ( $i_{qs}$ ) and the current error is fed to the proportional integral controller with unity gain. The inner current loop is provided for controlled yet fast dynamic of current with least sudden overshoot [12]. The Permanent magnet synchronous motor can be modeled by the following set of equations

Simplified speed control loop, Exact speed control loop using PID controller as shown in Figure 6 and Figure 7.

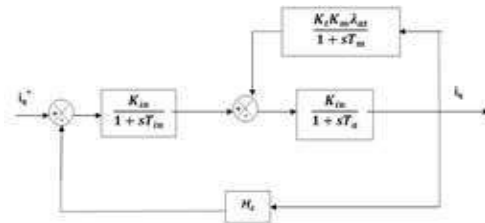


Figure5.CurrentControl Loop

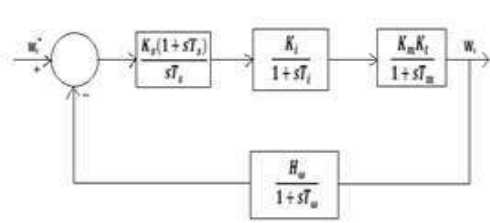


Figure6.SimplifiedSpeedControlLoop

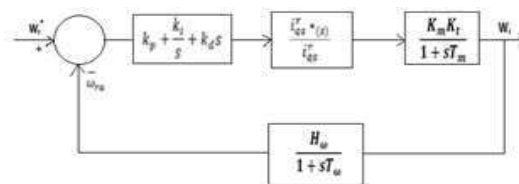


Figure 7. Exact Speed Control Loop Using PID Controller

#### 4. PERFORMANCE OF CLOSED LOOP PMSM DRIVE USING PI CONTROLLER

PI control is a name commonly given to two-term control; P stands for Proportional term and I for Integral term. P-I controller is mainly used to eliminate the steady state error resulting from P controller. The characteristics of PI control actions are (i) steady state accuracy improves (ii) reset time increases

(iii) band width decreases (iv) overshoot reduces. Increasing the proportional gain speeds up the transient response (reference tracking response and disturbance rejection response) and decreases the output offset from the desired constant reference value. Increasing gain may lead to instability [13-14]. Actually by increasing gain increases the size of the control signal, this may lead to saturation or limiting problems with the system actuators. The presence of integral action in a controller usually leads to a wider range of closed loop transient responses sometimes unstable ones. It generally slows down the response. The addition of integral action eliminates constant offset signals in steady state for both reference tracking and disturbance rejection responses. In this proposed closed loop model of PMSM drive, PI controller is chosen as a speed as well as a current controller in different combinations so as to reach the desired performance of the

System [15-16].The transfer-function of the PI controller is given as  $G_{PI}(s)=(K_p + K_I)...$  (43) where

S

$K_p$  and  $K_I$  are the proportional and integral gains respectively. SIMULINK block diagram of a closed loop PMSM drive using P current controller and PI speed controller as show in Figure 8. SIMULINK block diagram of a closed loop PMSM drive using current, speed both PI controller, and P current controller and PID speed controller as shown in Figure 9 and Figure 10.

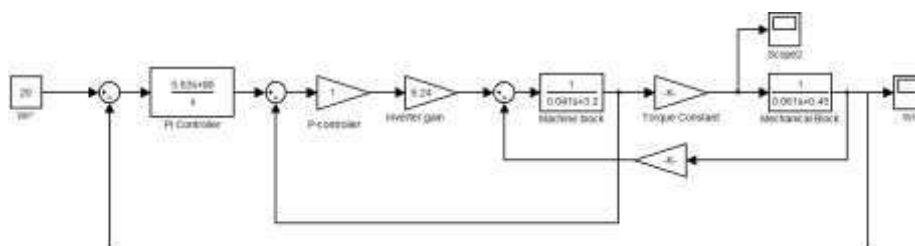


Figure8. SIMULINK Block Diagram of a Closed Loop PMSM Drive Using PI Current Controller and PI Speed Controller

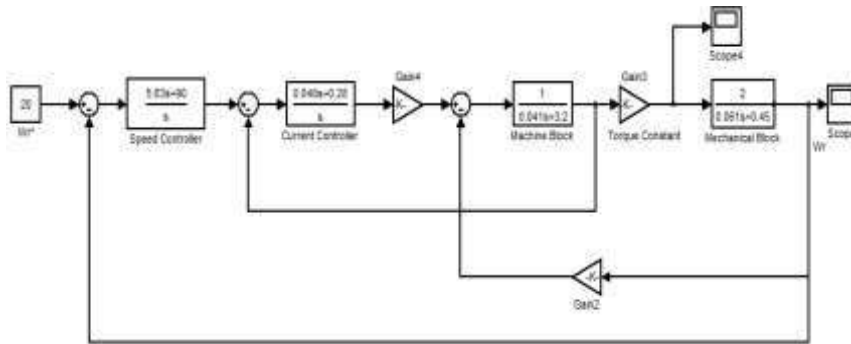


Figure 9. SIMULINK Block Diagram of a Closed Loop PMSM Drive Using Current and Speed Both PI Controller

## 5. PERFORMANCE OF CLOSED LOOP PMSM DRIVE USING PID CONTROLLER

PID control is a name commonly given to three-term control; P stands for Proportional term, I for Integral term, and D for Derivative term of the controller. PID controllers are probably the most widely used industrial controllers. Basically PID controller is a combination of PI and PD controllers. The necessity of using a derivative gain component in addition to the PI controller is to eliminate the overshoot and the oscillations occurring in the output response of the system [17-18]. It is a lag-lead compensator. One of the main advantages of the P-I-D controller is that it can be used with higher order processes including more than single energy storage. Thus the PID control may be used when the system requires improvements in both transient and steady state performances. The characteristics of PID control actions are (i) no oscillations (ii) improves the transient response (iii) improves the steady state performance. An advantage of using a derivative control action is that it responds to the rate of change of the actuating error and can produce a significant correction before the magnitude of the actuating error becomes too large. Derivative control action thus anticipates the actuating error, initiates an early corrective action, and tends to increase the stability of the system. There for derivative control action is always used in combination with proportional with proportional plus integral control action. In this proposed model, both the current and speed loop are designed with PID controller for getting improved response [19-20]. The transfer-function of the PID

Controller is given as  $G_{PID}(s)=(K_p s K_D K_I s), \dots\dots\dots$  (44) Where  $K_p, K_D$  and  $K_I$  are the

Proportional, derivative and integral gains respectively. Here the selection of three gains is such that the two zeros are to be placed at the negative real axis. So essentially the transfer-function becomes

$$G_{PID}(s) = \frac{K(s+z_{c1})(s+z_{c2})}{sK_p} \dots (45); \text{where } \underline{\text{proportional gain,}}$$

$$).....(29),$$

Derivative gain,  $K_D = K$

.....(46)and integral gain  $K_I$

$$=K^*z_{c1}^*z_{c2} \dots (47)$$

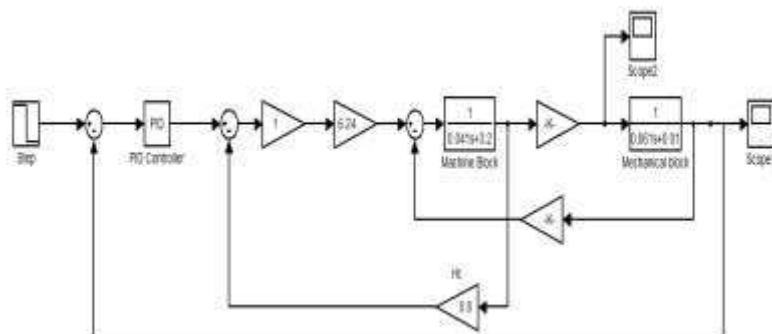


Figure10.SIMULINK Block Diagram of a Closed Loop PMSM Drive Using PI Current Controller and PID Speed Controller

## **6. DISCUSSION AND COMPARATIVE PRERFORMANCE EVALUATION BETWEEN PI AND PID CONTROLLED PMSM DRIVE**

The entire model of PMSM closed loop drive is divided into two loops, inner loop current and outer loop speed as shown in Figures 11-28. In the first case current control loop is determined using mathematical block diagram representation, using PI controller. By getting the simplified and exact current loop transfer functions of current controller, it is added to the speed control loop i.e. outer loop using PI controller. Simplified current loop transfer function is coupled with simplified speed loop and exact current control loop is coupled with exact speed control loop. Hence a typical performance study is introduced to familiar with the different performance indices of the closed loop system corresponding to time domain and frequency domain specifications. The time domain specifications of overall closed loop system like peak time, rise time, settling time, steady state value etc are determined analytically which in turn helps to familiar with the performance of PI controlled PMSM drive accordingly [21-22]. The frequency domain specifications of the system like gain margin, phase margin, gain and phase cross over frequencies are also determined by bode-diagram representation respectively. The stability analysis of overall speed and current loop representation of closed loop adjustable speed PMSM drive can be determined by root locus plot representation. Therefore different performance indices can be taken for the determination of dynamic as well as steady state response of closed loop PMSM drive. As the overall structure comprising of two loops and two kinds of classical controllers such as PI and PID are taken, therefore different combinations of controllers are taken into consideration for the performance study of closed loop model [23].

The performance of a control system is much dependent on its time domain specifications. The time response of a control system is usually divided into two parts: the transient response and steady-state response. The transient response of a practical control system often exhibits damped oscillations before reaching steady state. Here in this section for the determination of time domain performance characteristics four combinations of different classical controllers (PI & PID) are taken into consideration. By observing the different specifications of time domain analysis like rise time, settling time, peak overshoot, percentage error etc. a comparative study may be carried out. As per the convention rise time is the time required for the response to rise from 10%-90% of the final value in cases of over damped or critically-damped systems, or 0-100% of the final value in case of under damped systems [24]. Here in this analysis rise time is much lesser (i.e. 0.221 sec) in the 4<sup>th</sup> case i.e. if the combination of current and speed both loop can be configured by using a PID controller. Therefore the presence of derivative control in both loops improves system response. The time required for the response to damp out all the transients is commonly called the settling time. The settling time is related to the largest time constant of the system. Since the settling time is inversely proportional to the undamped natural frequency of the system, value of damping ratio is usually determined from the requirement of permissible maximum overshoot. It is observed that among the four cases the system is settled faster in the 4<sup>th</sup> case i.e. current loop PID and speed loop PID. However performances of all the systems are determined by this specification. Peak overshoot is the peak value of the response curve measured from unity. If the final steady-state value of the response differs from unity, then it is common to use percentage overshoot. The amount of maximum overshoot directly indicates the relative stability of the system [25]. It is observed that the addition of derivative control action in both the loops, percentage overshoot is decreased and hence improves system performance. Steady state error is the difference between actual output and desired output as time tends to infinity. The speed response is found to be slightly under damped, caused by the speed controller setting. The electromagnetic torque response is found to be almost ripple-free, mainly because of the SPWM inverter and the machine inductances. The speed response shows a slight overshoot as desired, because while designing the speed loop, the damping ratio has been assumed 0.707. The developed torque is initially high in order to bring the speed near to its set quickly. The steady state error in speed is obtained to be zero and the speed settles within a time duration which is acceptable. Better speed and torque response can be achieved by designing a PID speed controller as compared to a PI controller [26-27].

By the term frequency response, we mean the steady-state response of a system to a sinusoidal input. In frequency-response methods, we vary the frequency of the input signal over a certain range and study the resulting response. Bode diagram is one of the effective method for determination of frequency response characteristics of a closed loop system. The phase margin is that amount of additional phase lag at the crossover frequency required to bring the system to the verge of instability. The crossover frequency is the frequency at which the magnitude of open loop transfer function is unity [28-29]. On the other hand gain margin is the reciprocal of the magnitude at the frequency at which the phase angle is  $-180^\circ$ . Thus a positive gain margin means that system is stable, and a negative gain means that the system is unstable. Here in the entire cases gain margin, phase margin, cross over frequencies are determined and it is observed that the gain margin is positive in all the cases and phase margin is increased with the addition of derivative control action in both the cases.

The root locus method yields a clear indication of the effects of parameter adjustment. By using the method, the designer can predict the effects on the location of the closed loop poles by varying the gain value or adding open-loop poles and/or open-loop zeros. By observing the root locus plots approximate stability can be obtained very quickly which in turn helps to familiar with the stability performance of the system accordingly [30].



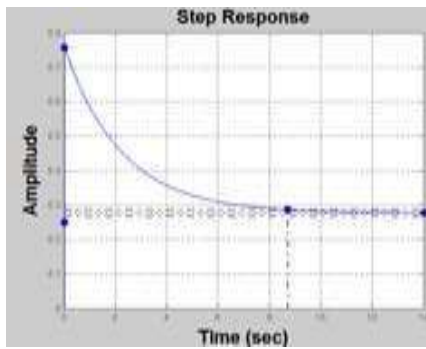


Figure11. Step Response Representation of Exact Current Loop

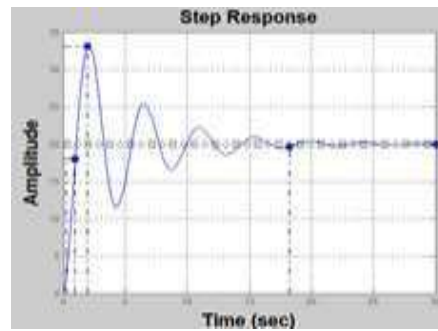


Figure12. Step Response Representation of Simplified Speed Control Loop with PI Controller

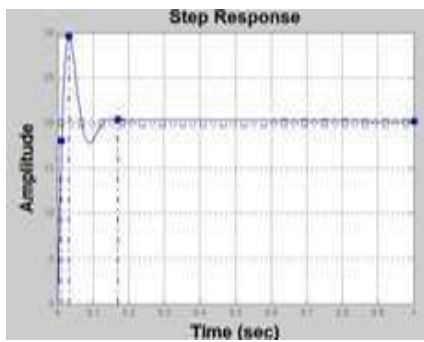


Figure13. Step Response Representation of Simplified Speed Control Loop with PID Controller

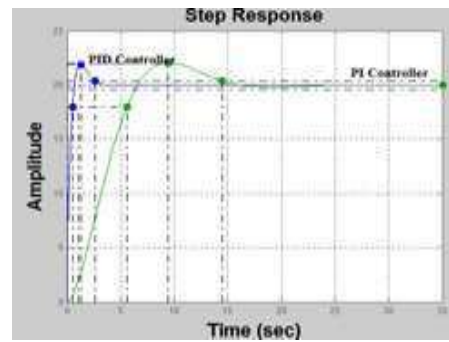


Figure14. Comparative Step Response Characteristics of Overall Speed and Current Loop Using PID and PI Controller

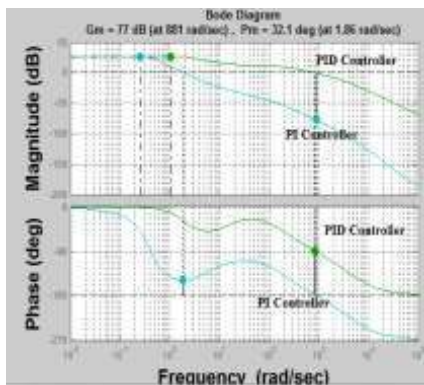


Figure15. Comparative Bode Diagram Representation of Overall Speed and Current Loop Using PID and PI Controller

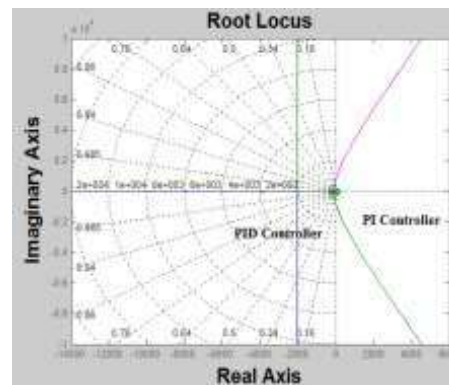


Figure16. Comparative Root Locus Plot Representation of Overall speed and Current Loop Using PID and PI Controller

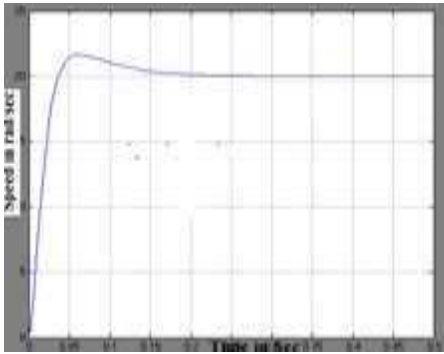


Figure17. Actual Speed vs. Time Wave for m using P Current Controller and PI Speed Controller of the Closed Loop Adjustable Speed PMSM Drive When a Step Change in Reference Speed of 20 rad/sec is introduced

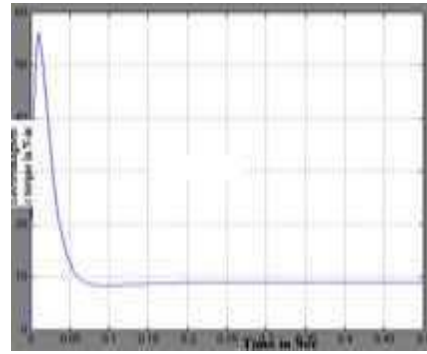


Figure18. Electromagnetic Torque vs. Time Wave form of the Closed Loop Adjustable Speed PMSM Drive using P Current Controller and PI Speed Controller

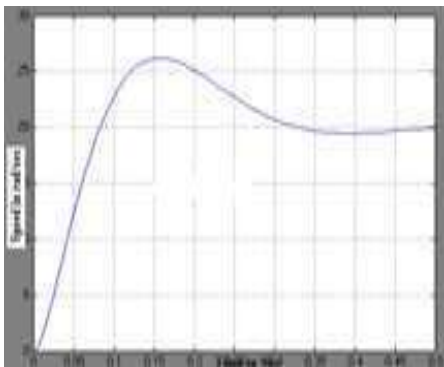


Figure19. Actual Speed vs. Time Wave for m using Current and Speed Both PI Controller of the Closed Loop Adjustable Speed PMSM Drive When a Step Change in Reference Speed of 20 Rad/Sec Is Introduced

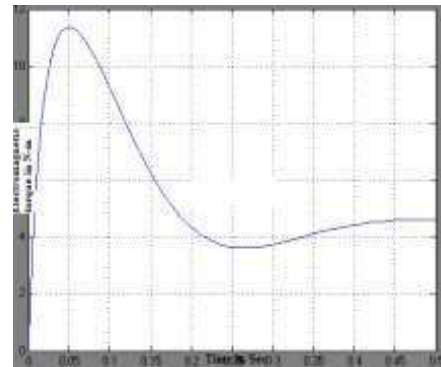


Figure20. Electromagnetic Torque vs. Time Wave form of the Closed Loop Adjustable Speed PMSM Drive Using Current and Speed Both PI Controller

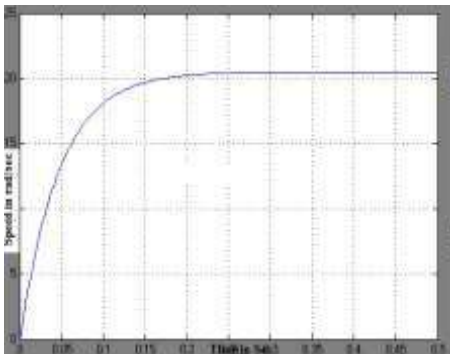


Figure21. Actual Speed vs. Time Waveform Using PI Current Controller and PID Speed Controller of the Closed Loop Adjustable Speed PMSM Drive When a Step Change in Reference Speed Of 20 Rad/Sec Is Introduced

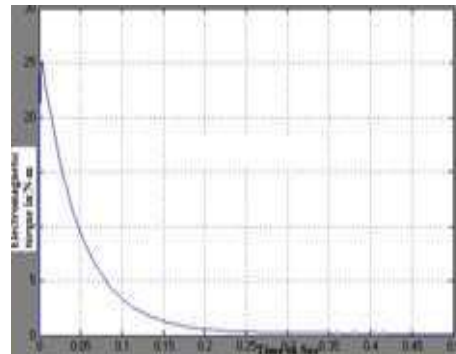


Figure22. Electromagnetic Torque vs. Time Waveform of the Closed Loop Adjustable Speed PMSM Drive Using PI Current Controller and PID Speed Controller

## Different Case Studies

Case1: Current loop PID , Speed loop PI

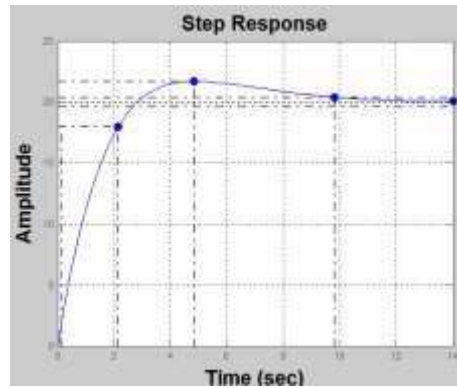


Figure23.Step Response Characteristics of Overall Speed and Current Loop Using PI and PID Controller

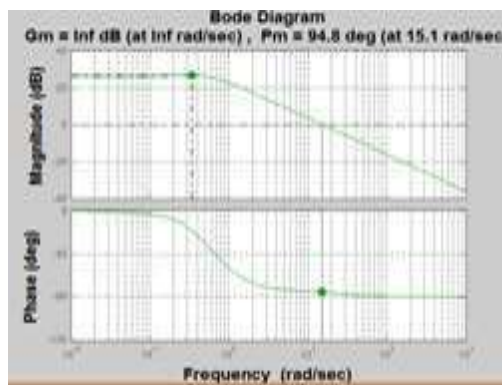


Figure24.Bode Diagram Representation of Overall Speed and Current Loop Using PI and PID Controller

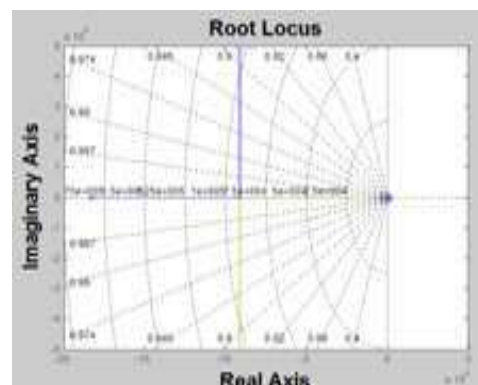


Figure25. Root Locus Plot Representation of Overall Speed and Current Loop Using PI and PID Controller

Case2: Current loop PID, Speed loop PID

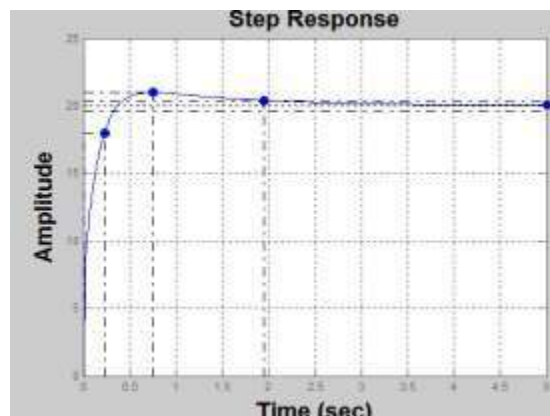


Figure26.Step Response Characteristics of Overall Speed and Current Loop Both Using PID Controller



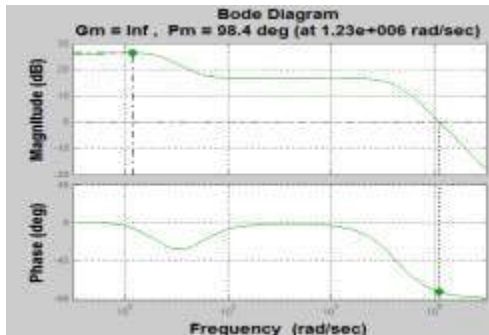


Figure27. Bode Diagram Representation of Overall Speed and Current Loop Both Using PID Controller

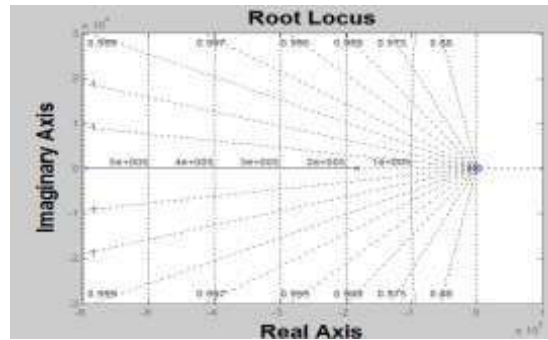


Figure28. Root Locus Plot Representation of Overall Speed and Current Loop Both Using PID Controller

## 7. CONCLUSIONS

This paper significantly describes the comparative performance analysis of closed loop model of an adjustable speed PMSM drive using classical PI and PID controller. The different performance in dices related to time domain specifications of the system like settling time, rise time, peak overshoot, steady state error and frequency domain specifications like gain margin, phase margin, cross over frequencies etc. are determined analytically. Overall Performance of the closed loop model of the PMSM drive is tested and monitored. Hence the system behavior is sensitive for parameter variations in order to tuning the controller gains. Therefore this model can predict dynamic as well as steady state behavior of the system respectively. Hence a more stable performance with reduced overshoot, faster response, better accuracy can be gained by designing a PID controlled adjustable speed PMSM drive. By comparing all the performance indices, the drawbacks of a classical PI controller as current and speed can be overcome by incorporating a classical PID controller for widespread applications. By taking the two loops control structure consisting of outer loop speed and inner loop current, the overall structure can be implemented using different classical controllers and soft computing controllers in future. Finally one hardware/experimental setup will be developed for the validation of the results obtained from analytical studies. Thus the choice of controller may be an effective tool for closed loop control of a PMSM drive in specific environment for performance optimization.

## APPENDIX

The parameters of the Permanent Magnet Synchronous Machine (PMSM), on which the studies are made in this paper, are: Number of pole  $P=4$ , armature resistance  $R_s=3.2$  ohm, combined moment of inertia  $J=0.061$  kg-m<sup>2</sup>, damping co-efficient  $F_n=0.45$  Nm-s/radian, d-axis inductance  $L_d=0.053$ H, q-axis inductance  $L_q=0.041$ H, torque constant  $K_t=0.927$ N.m/A, mechanical gain  $K_m=100$  rad/s/Nm, electrical gain  $K_a=0.3125$ , motor mechanical time constant  $T_m=6.1$ s, dc link voltage  $V_{dc}=96$ V, switching frequency  $f_c=2$ Khz, maximum control voltage  $V_{cm}=10$ V.

## REFERENCES

- [1] R.Krishnan, "Electric Motor Drives-Modelling, Analysis and Control", PHI, New Jersey, 2001
- [2] Bimal K. Bose, "Modern Power Electronics and AC Drives", Prentice Hall, 2001
- [3] Katsuhiko Ogata, "Modern Control Engineering", PHI, Third Edition, 1998
- [4] M.Gopal, "Control Systems, Principles and Design", Tata McGraw Hill, Fourth Edition, 2012
- [5] A.V. Sant and K.R. Rajagopal, "PM synchronous motor speed control using hybrid fuzzy PI with novel switching functions", *IEEE Trans. Mag.*, vol. 45, no. 10, pp. 4672-4675, Oct. 2009
- [6] A.V. Sant and K.R. Rajagopal, "Novel hybrid fuzzy-PI controllers for the speed control of permanent magnet synchronous motors", presented at the IEEE Int. Magn. Conf., Sacramento, CA, May 4-8, 2009
- [7] H.M. Kamel, H.M. Hasanien, and H.E. Ibrahim, "Speed control of permanent magnet synchronous motor using fuzzy logic controller", *Proc. IEEE Int. Conf.: Electric Machines and Drives*, Miami, Florida, U.S.A., pp.1587- 1591, 3-6 May 2009.
- [8] P.Pillay and R. Krishnan, "Modelling of permanent magnet motor drives", *IEEE Trans. Industrial Electronics*, vol. 35, no. 4, pp. 537 - 541, Nov. 1988
- [9] Faa-Jeng Lin, Chih-Hong Lin, "A Permanent-Magnet Synchronous Motor Servo Drive Using Self-Constructing Fuzzy Neural Network Controller", *IEEE Transactions on Energy Conversion*, pp.66-72, 2004,
- [10] Kyeong-Hwa Kim, Myung-Joong Youn. "A simple and robust digital current control technique of a PM synchronous motor using time delay control approach", *IEEE Transactions on power electronics*, vol. 16, pp.72-82, 2001
- [11] Y. Inoue, S. Morimoto, and M. Sanada, "A novel control scheme for maximum power operation of synchronous reluctance motors including maximum torque per flux control", *IEEE Trans. Industry Applications*, vol. 47, no. 1, pp.115-121, 2011
- [12] Oladimeji Ibrahim, NorZaihar BYahaya, Nordin Saad, "PID Controller Response to Set-Point Change in DC-DC Converter Control", *International Journal of Power Electronics and Drive Systems*, Vol7, No2, June.2016
- [13] Gupta N.P, Gupta P, "Performance Analysis of Direct Torque control of PMSM Drive Using SVPWM-Inverter" *Power Electronics (ICPE)*, 2012 IEEE India International Conference on, pp.1-6, 6-8 Dec.2012
- [14] K. Ang, G. Chong, and Y. Li, "PID control system analysis, design and Technology," *IEEE Trans. control system Technology*, Vol.13,

PP. 559- 576, July 2005

- [15] Al-Nabi E, Wu B, Zargari NR, Sood V. "Input power factor compensation for high-power CSC fed PMSM drive using d-axis stator current control." *IEEE Transactions on Industrial Electronics*, pp. 59(2):752–761, 2012
- [16] S. Benaicha, R. Nait-Said, F. Zidani, M-S.Nait-Said, B.Abdelhadi, "A direct torque fuzzy control of SVM inverter-Fed Induction Motor drive", Proc .of the International Journal of Artificial Intelligence and Soft Computing, Vol. 1, Nos.2-4,pp. 259– 270,2009
- [17] PK Biswas, Atanu Banerjee, Chiranjit Sain, "Design and Development of a Closed Loop Model of an Adjustable Speed Permanent Magnet Synchronous Motor (PMSM) Drive using PI Controller"- International Conference on Power Electronics Systems and Applications (PESA), Hongkong Polytechnic University, Hongkong, pp.1-5, 15-17 December, 2015, <http://ieeexplore.ieee.org>
- [18] J.H. Jang, S.K. Sul, J.I. Ha, K. Ide, and M. Sawamura, "Sensor less drive of surface mounted permanent magnet motor by high frequency signal injection based on magnetic saliency," *IEEE Trans. Ind. Appl.*, vol. 9, no. 4, pp. 1031–1039, Jul./Aug. 2003
- [19] M.Tursini, R.Petrella, and F.Parasiliti, "Initial rotor position estimation method for PM motors", *IEEE Trans. Ind. Appl.*, vol.39,no.6,pp.1630–1640,Nov./Dec.2003
- [20] Atanu Banerjee, P K Biswas, Chiranjit Sain, " The Comparative Study Between Different Performance Indices of a Permanent Magnet Synchronous Motor (PMSM) Drive on Variable Sensor Angle", International Conference on Power Electronics Systems and Applications(PESA), Hongkong Polytechnic University, Hongkong,pp.1-6,15-17 December, 2015, <http://ieeexplore.ieee.org>
- [21] R.Balamurugan, J.Pearly Catherine," An Approach of Power Factor Correction in BLDC Motor Drives Using Cuk Derived Converters", *TELKOMNIKA Indonesian Journal of Electrical Engineering*, Vol. 12, No 12, pp. 8092- 8097, 2014
- [22] M.Hilairet, F.Auger, and E.Berthelot, "Speed and rotor flux estimation of induction machines using at two-stage Extended Kalmanfilter", *Automatica*, vol.45, no.8,pp.1819–1827,Aug.2009.
- [23] K.Hongryel, S.Jubum, and L.Jangmyung, "A high-speed sliding-mode observer for the sensor less speed control Of a PMSM," *IEEE Trans. Ind. Electron.* ,vol. 58,no.9,pp.4069–4077,Sep.2011
- [24] Lini Mathew and Vivek Kumar Pandey, "Design and development of fuzzy logic controller to control the speed of permanent magnet synchronous motor", *Journal of Electrical and Electronics Engineering Research*, Vol. 3(3), pp.52-61, Feb. 2011
- [25] Farhad Safargholi, "Unity Power Factor at the Power Supply Side for MATRIX Converter Fed PMSM Drives", *International Journal of Electrical and Computer Engineering (IJECE)*, Vol4,No.1,pp.138-144, 2014.
- [26] Kamel Saleh, Mark Sumner, " Modeling and Simulation of a Sensor less Control of a True Asymmetric Cascade H-Bridge Multi level Inverter PMSM Drives", *International Journal of Power Electronics and Drive Systems*, Vol. 7, No 2,June.2016
- [27] M. Gougani, "Hall sensor-based locking electric differential system for BLDC motor driven electric vehicle with independent wheel drives", Electric Vehicle Conference (IEVC), pp. 1-7, 2012
- [28] A. Sathyan, N. Milivojevic, L. Young-Joo, M. Krishnamurthy and A. Emadi, "An FPGA-Based Novel Digital PWM Control Scheme for BLDC Motor Drives", *IEEE Trans. on Industrial Electronics*, Vol. 56 , No. 8, pp. 3040– 3049, 2009.
- [29] J.Park, S.Hwangand J.Kim, "Sensor less control of brushless DC motors with torque constant estimation for home appliances", *IEEE Trans. on Industry Applications*, Vol. 48, No. 2, pp. 677-684, 2012
- [30] Lin C. H., "A Novel Hybrid Recurrent Wavelet Neural Network Control for a PMSM Drive Electric Scooter Using Rotor Flux Estimator", *International Review of Electrical Engineering - IREE*, Vol. 7, N. 3, pp. 4486-4498, 2012