

Avoiding Vehicle Accident by Using Internet of Things

¹Noorulla shaik

Department of Computer Science and
Engineering
Sathyabama University
Vaivaka, Chennai, India
noorullask83@gmail.com

²G. Gowtham Varma

Department of Computer Science and
Engineering
Sathyabama University
Vaivaka, Chennai, India
gowthamvarma2112@gmail.com

³DR.G. M. Karpura Dheepan M.E., (Ph.D),

Assistant Professor
Department of Computer Science and
Engineering
Sathyabama University
Vaivaka, Chennai, India
karpuradheepan.cse@sathyabama.ac.in

Abstract- Our project will offer the best way to address this disadvantage. According to this concept, a vibration sensor will detect the signal as soon as a car collides with something or rolls over, and it will then transmit that signal to the Nodemcu controller. The Nodemcu Microcontroller detects alcohol, monitors eye blinks, and sends alert messages via the Internet of Things, including the position to a rescue squad or police control room. In order for the police to take the appropriate action, they must first confirm the location. To save the medical rescue team's precious time, the driver can turn off the alert message if there is a minor collision or if there is no imminent threat to anyone's life. Through the employment of both vibration sensors, alcohol detection content, and eye blink tracking, this article helps to accurately detect accidents.

Keywords: GSM, SMS, Embedded C, NodeMCU, Alcohol sensor, Vibration sensor, Eye Blink sensor.

INTRODUCTION

The variety of avenue accidents in Malaysia is growing at an alarming price. In 2018, the Malaysian Ministry of Transport (MOT) recorded 548,598 avenue accidents, resulting in 6,284 deaths. Whether a victim is alive or useless is decided via the response time of the Emergency Response Service (ERD), which depends on how fast the ERD gets information about the incident. The importance of quick reaction time inside the occasion of an accident is important for twist of fate sufferers. Detailed evaluation indicates that a one-minute discount inside the response time to a twist of fate will increase the risk of saving a person by using up to 6%.

In general, the response time to an accident is related to the region and severity of the accident, in addition to the congestion across the accident web site. With less site visitors, the response time of the ERD to the accident notification inside the occasion of an accident will increase, on occasion up to 24 hours GSM communications are employed as a technique for manipulating and managing loads. Go from everywhere in the international by means of sending a message. It has its very own determinism. So here it's far used to reveal and control DC motor, stepper motor, temperature sensor and strong nation relay by way of sending message thru GSM modem. Hence there may

be no want to waste time on manual coping with and transportation. Therefore, it's far considered as a totally powerful conversation through mobile communication, useful in industrial manipulate systems, vehicles and every other remotely managed gadgets. It is greater comparatively cheap and fee effective; consequently GSM is desired for this control technique. ZigBee - ZigBee Global Positioning System is used for tracking and navigation in cars.

RELATED WORK

An essential phase in the process of developing software is evaluating the literature. Prior to expanding the device, it is crucial to consider time factors, cost savings, and commercial enterprise robustness. Finding the operating systems and languages needed to expand the device comes next, after those requirements are satisfied. When a programmer starts building a device, they need several kinds of outside assistance. Advanced programmers, books, and websites can all provide this assistance.

We expand the suggested tool by taking into account the aforementioned issues prior to system creation. Examining and assessing all requests for improvement is a major task for the mission development branch. The most crucial stage in the software program improvement approach for every difficulty is the literature evaluation. Time considerations, aid requirements, human resources, economics, and organizational skills should be identified and examined prior to developing equipment and related designs. Finding the software program specifications for your particular PC, the operating system needed for your assignment, and the software programs needed for the switch are the next steps after these variables have been considered and thoroughly investigated. Steps such as developing equipment and related characteristics.

Lu Wei, Lei Gao, Jian Yang, and Jinhong Li created a novel reinforcement learning technique for traffic light control in 2023. To better comprehend traffic demand, their method takes into account both moving and halted cars. They enhanced traffic flow and

decreased delays and queues in simulations by employing a deep reinforcement learning-based approach [1]. Using deep learning, Yacong GAO, Chenjing Zhou, Jian Rong, Yi Wang, and Siyang Liu created a technique in 2022 to forecast short-term traffic speeds. To increase accuracy, they employed historical and projected traffic flow data, and they discovered that the LSTM model performed best. This approach facilitates more efficient route planning for cars and traffic management [2].

In 2021, Bijan Moaveni and Fatemeh Khosrosereshki presented a traffic model for crossing metro lines that concentrated on the effects of transfer stations. Their nonlinear discrete event model takes technological delays into consideration and illustrates how these disruptions spread and impact system stability. The model's ability to effectively manage delays and accurately depict metro traffic behaviour was confirmed when it was tested using actual data from Tehran's metro [3]. To enhance traffic management, Yash M. Dalal, Soumyalatha Naveen, and Ashwin Kumar UM presented a technique in 2023 that combines image detection with Gaussian blur. By precisely identifying cars and examining traffic patterns, this method aids urban planners in minimizing gridlock and improving traffic flow [4].

Xiaoping Ma, Siboluo, Honglan Huang, and Yanpiao Chen created a traffic management plan in 2023 that integrated intersection monitoring, prediction, and control. To enhance traffic flow, they clustered intersections and adjusted signal timing using clever algorithms. Simulations demonstrated that it outperformed other approaches in terms of efficiency and delay reduction [5]. Jiaming Wang, Long Xu, Zhonghe He, and Li Wang created a model in 2022 to examine urban traffic flow while taking into account various means of transportation, such as buses and autos. They developed a three-dimensional model to examine how buses and cars interact and impact traffic capacity using data from Beijing's road network. Their methodology is helpful for managing traffic control in places with varying travel needs and aids in understanding how traffic changes over time [6].

Edouard Ivanjko, Željko Majstorović, Mladen Miletić, and Filip Vrbanić collaborated on defining key traffic situations for urban mobility in 2021. They analyzed traffic data from Slovenian motorways using machine learning techniques. By developing pertinent scenarios for machine learning models, their findings will aid in the improvement of traffic management systems [7]. Victor Cherniy, Olena Sharovara, Ihor

Vasyliiev, Sergiy Bezshapkin, and Olena Verenykh conducted research on road traffic management in Kyiv, Ukraine, in 2020. They enhanced traffic planning and decision-making by utilizing contemporary technology such as GIS and spatial databases. Through their efforts, the city was able to improve its traffic control system [8].

A smart traffic control system that modifies signal timings according to traffic flow was created in 2024 by Devika S. G., Govind A., and Lekshmi D. It also uses the YOLO v8 algorithm and siren detection to prioritize emergency vehicles, such as ambulances. This technique enhances safety and lessens traffic [9]. In order to examine traffic with regular and connected automobiles, Zuping Cao, Lili Lu, Chen Chen, and Xu Chen developed a model in 2023. According to their findings, traffic flow improves with more linked cars on the road, cutting down on wait times and travel times. Queue lengths were cut by 64.6% and travel times were shortened by 48.3% when all vehicles were connected [10].

EXISTING SYSTEM

When a car is involved in an accident, the location's GPS coordinates and the car's number are instantly sent to the hospitals in the area, guaranteeing that those in need receive assistance in a timely manner. The owner receives a text message informing them of the car's condition when it is attempted to crank. If the car's engine fails during a lengthy drive. Time is saved by capturing and transmitting the GPS coordinates and error signals from the vehicle's dash board to the nearby service facility. Here, the GPS is utilized to track the precise location of the vehicle, and the GSM is used to transmit the text message. The GPS module, GSM, and microcontroller (PIC 16F877A) communicate with each other via the serial communication interface UART. The following are some uses for the RS232 communication standard. Properties of electrical signals, including voltage levels, signalling rates, timing and slew rates, short-circuit behaviour, and voltage withstand levels.

Disadvantages

- Not audible in buildings
- Unable to pinpoint precise accident scenes during incidents there is virtually little communication speed.
- We are unable to find the car.

PROPOSED SYSTEM

Our system's primary goal is to identify the accident and notify hospital administration and parents. The suggested system tracks vehicles using a GPS modem

and leverages the Internet of Things to detect car accidents and notify authorities of them.

Advantages

- Since the car can only be started if the owner acknowledges it, high security is achieved.
- If a car breaks down, we do not have to look for a service shop.
- The accident victims can receive prompt medical assistance.
- During accidents, the precise coordinate can be determined.
- In addition to preventing drunk driving, we may keep an eye on the driver's heart rate.

SYSTEM ARCHITECTURE

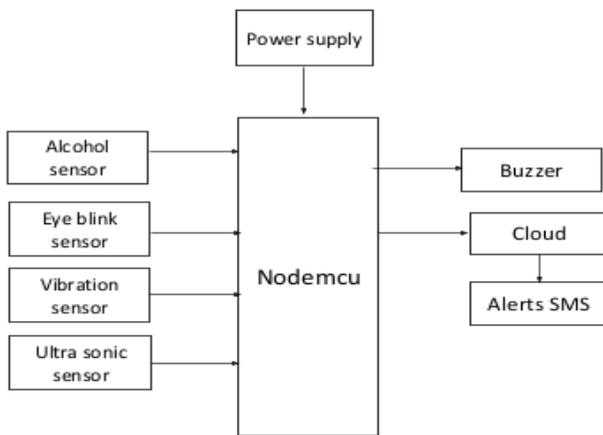


Fig 1: System Architecture

Hardware Components explanation

- Power supply
- Alcohol sensor
- Eye blink sensor
- Vibration sensor
- Ultra sonic sensor
- NodeMCU
- Buzzer

Rectifier




A rectifier is an electrical device that uses one or more P-N junction diodes to change alternating electricity into direct current. A diode only allows current to flow in one direction, just like a one-way valve. This method is known as "rectification." A rectifier that transforms the entire alternating current cycle into pulsing DC is known as a full wave rectifier. Full wave rectifiers use the entire input AC cycle, as opposed to half wave rectifiers, which only use the half wave. There are two primary types of rectifiers: regulated and unregulated. Rectifiers with a variable voltage are known as controlled rectifiers. MOSFETs, IGBTs, or SCRs can be used to convert an uncontrolled rectifier into a controlled rectifier. Compared to unmanageable ones, these are better.

Regulator



A controller is a device or equipment that automatically controls things like the temperature of a room or a person's body temperature. An automated voltage regulator keeps the generator's output steady. With the use of additional electrical additives, voltage regulators (VRs) maintain a strong supply's voltage within manageable bounds. Although some can convert electricity from AC to AC or DC to DC, voltage regulators are mostly employed to convert DC to DC. Regardless of load conditions or feedback voltage changes, a voltage regulator generates a constant current depth voltage. Direct and variable voltage regulators are the two types available. The output of a regulated strength deliver has voltage regulators. The regulator ensures that the output voltage is consistently within the electricity deliver rating, thus the quantity of current pulled via the tool is independent.

Transformer

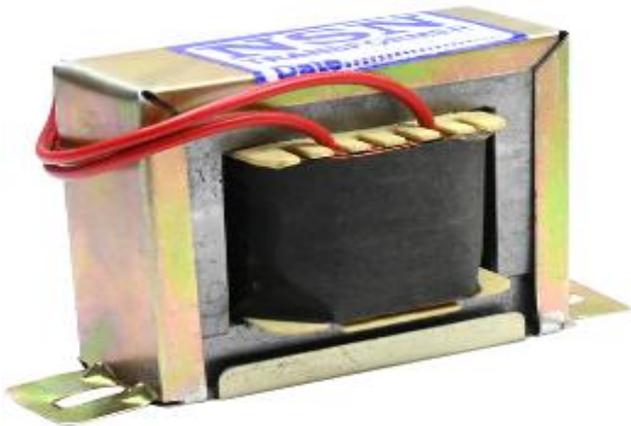

A step-down transformer lowers the voltage that enters the site by boosting electrical current. It accomplishes this by switching between the crucial lower voltage in the optional windings and the high approaching voltage in the important twisting. An electrical device known as a step-down transformer lowers the voltage of an AC power source. It consists of an iron centre, an optional winding, and a necessary winding.

NODE MCU

The low-cost ESP8266 device-on-chip (SoC) serves as the foundation for the open-source software and hardware development environment known as NodeMCU (Node Microcontroller Unit). The ESP8266, created and manufactured by Espressif Systems, contains the standard laptop components of CPU, RAM, and community (Wi-Fi) in addition to a contemporary operating system and SDK. Because of this, it is ideal for a wide range of Internet of Things (IoT) tasks. For college students, hackers, or hobbyists who need to test their own IoT projects, this is a significant hardship.



Fig 2. Nodemcu

IOT (Internet of Things)

IoT stands for Internet of Things, which means that getting access to and the use of the devices and home equipment you use every day on line.

Our IoT guide covers all IoT topics consisting of get entry to, functions, pros and cons, surroundings, framework of desire, architecture and domains, biometrics, CCTV cameras and security systems. Opening doors, gadget.

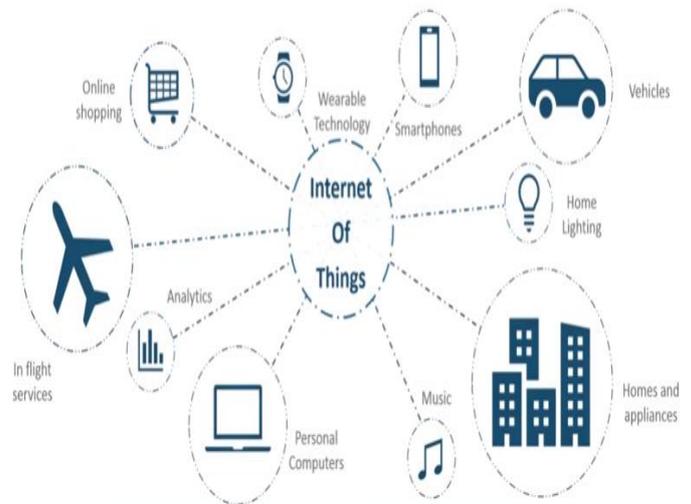


Fig 3. IOT Internet of Things

MQ2 Gas Sensor:

The MQ2 fuel sensor is a Metal Oxide Semiconductor (MOS) gas sensor, in particular used to hit upon gases which include methane, butane, LPG, smoke, and many others. Also known as chemiresistors because the sensor detects gasoline based totally on changes in resistance. Matter in contact with gas.



Fig 5. MQ2 Sensor.

Buzzer

There are many procedures to the connection between someone and art work. A preferred manner to


degree volume is to apply a buzzer. Therefore, in layout method, some clever technologies are frequently related to configurations.



Fig 8. Buzzer

GSM MODEM:

The Global System for Mobile Communication (GSM) is a widely accepted standard for digital cellular communication. In order to create a single European mobile telephone standard that would outline specifications for a 900 MHz pan-European mobile cellular radio system, a standardization group known as GSM was established in 1982.

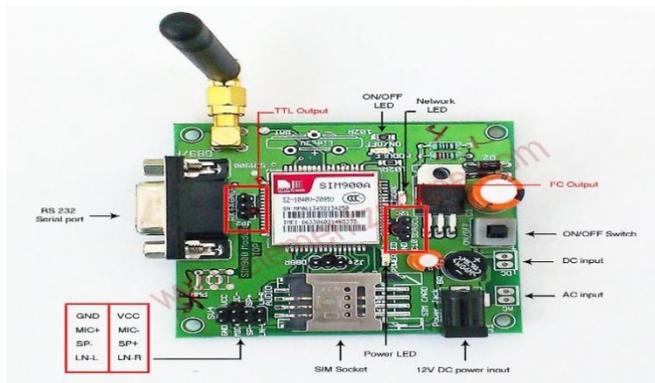

Eye blink sensor

To determine if a person's eye is closed, an eye blink sensor uses infrared technology. Both an infrared transmitter and an infrared receiver comprise the sensor. While the transmitter emits infrared rays onto the eye, the receiver searches for changes in the reflected waves that would suggest that the eye has blinked.



Fig: Eye Blink Sensor

Vibration Sensor

For screening and analytical purposes, a vibration sensor also known as a vibration detector—measures the vibration levels in machinery. Industrial vibration sensors are used by maintenance crews to monitor conditions and determine the frequency and intensity of vibration signals. In addition to general vibration levels that show whether your asset is stretched, vibration sensors can give more detailed readings.



Fig: Vibration sensor

Ultrasonic sensors

UAVs employ stereo vision and ultrasonic sensors to determine how far away they are from the ground. A flight control system can then use ultrasonic sensors to keep the vehicle at a certain altitude. Ultrasonic pulses are sent towards the ground by an ultrasonic sensor, which then receives the reflection of the pulses when they bounce off the ground. As time passes between the transmitted and reflected waves, the sensor determines the distance to the ground.



Fig: Ultrasonic sensors



USED SOFTWARE

Programming Language: Embedded C

Embedded C is a microcontroller-based totally programming language that uses hardware I/O addressing, fixed-factor mathematics, and different functions that distinguish it from C. Embedded systems are specialised systems designed to carry out specific features or duties. An embedded device consists of both hardware and software, with the software often called firmware integrated into the computer hardware. Embedded C is used to program a extensive variety of microcontrollers and microprocessors. Embedded C requires fewer resources than better-stage languages which include assembly programming language.

ARDUINO IDE AND ITS PROGRAMMING

Similar to your computer, Arduino is a tool for creating computer systems that can sense and control the physical world. It is an open-source platform for physical computing that is mostly built on a simple microcontroller board and a programming environment for creating board software. With the ability to receive inputs from various switches or sensors and operate various lighting fixtures, automobiles, and other body outputs, Arduino can be used to construct interactive objects. Arduino projects have the ability to operate independently or in conjunction with computer programs.

Result and Discussion

This project uses sensors and Internet of Things technology to improve road safety and emergency response. When an accident occurs, a vibration sensor detects it and alerts the system. It detects symptoms of fatigue by tracking eye blinks and determining whether the driver is inebriated. If any of these issues are discovered, the system alerts law enforcement or rescue personnel to the location of the car. If the collision is minor and the driver is unharmed, they can switch off the alert to conserve emergency resources.

CONCLUSION

An important step toward reducing collisions and improving road safety is the incorporation of the Internet of Things (IoT) into car safety systems. IoT offers proactive measures like identifying possible hazards, warning drivers, and even automatically controlling car functions to prevent collisions by utilizing real-time data from several sensors, GPS, and communication technologies. In addition to lowering the chance of accidents, this strategy makes sure that important information is quickly shared with emergency services in the case of an occurrence. It is anticipated that when IoT technology develops further, its use in car safety will go even further, providing more complete solutions for preventing collisions and ultimately saving lives on the road.

REFERENCES

1. L. Wei, L. Gao, J. Yang and J. Li, "A Reinforcement Learning Traffic Signal Control Method Based on Traffic Intensity Analysis," 2023 42nd Chinese Control Conference (CCC), Tianjin, China, 2023, pp. 6719-6724, doi: 10.23919/CCC58697.2023.10240019.
2. Y. Gao, C. Zhou, J. Rong, Y. Wang and S. Liu, "Short-Term Traffic Speed Forecasting Using a Deep Learning Method Based on Multitemporal Traffic Flow Volume," in IEEE Access, vol. 10, pp.

- 82384-82395, 2022, doi: 10.1109/ACCESS.2022.3195353. pp. 10392-10399, 2021, doi: 10.1109/ACCESS.2021.3050199.
3. F. Khosrosereshki and B. Moaveni, "Traffic Modeling and Validation for Intersecting Metro Lines by Considering the Effect of Transfer Stations," in *IEEE Access*, vol. 10, pp. 1946-1955, 2022, doi: 10.1109/ACCESS.2021.3139470.
 4. X. Ma, S. Lu, H. Huang and Y. Chen, "A Comprehensive Regional Traffic Coordination Control Strategy Integrated the Short-Term Traffic Flow Identification and Prediction," in *IEEE Intelligent Transportation Systems Magazine*, vol. 15, no. 4, pp. 137-149, July-Aug. 2023, doi: 10.1109/MITS.2023.3253134.
 5. Y. M. Dalal, S. Naveen and A. K. UM, "Unveiling Traffic Patterns for Effective Traffic Management System," 2023 International Conference on Network, Multimedia and Information Technology (NMITCON), Bengaluru, India, 2023, pp. 1-6, doi: 10.1109/NMITCON58196.2023.10276327.
 6. J. Wang, L. Xu, Z. He and L. Wang, "Macroscopic Traffic Flow Modeling and Empirical Analysis of Multiple Modes of Travel in Urban Road Network," 2022 4th International Academic Exchange Conference on Science and Technology Innovation (IAECST), Guangzhou, China, 2022, pp. 513-517, doi: 10.1109/IAECST57965.2022.10061880.
 7. F. Vrbančić, M. Miletić, E. Ivanjko and Ž. Majstorović, "Creating Representative Urban Motorway Traffic Scenarios: Initial Observations," 2021 International Symposium ELMAR, Zadar, Croatia, 2021, pp. 183-188, doi: 10.1109/ELMAR52657.2021.9550867
 8. V. Cherniy, S. Bezshapkin, O. Sharovara, I. Vasyliiev and O. Verenych, "Modern Approach to the Road Traffic Management in Cities of Ukraine: Case Study of Kyiv Municipal Company "Road Traffic Management Center"," 2020 IEEE European Technology and Engineering Management Summit (E-TEMS), Dortmund, Germany, 2020, pp. 1-6, doi: 10.1109/E-TEMS46250.2020.9111757.
 9. D. S. G, G. A and L. D, "Next-Generation Traffic Control: Adaptive Timer and Emergency Vehicle Priority in Intelligent Traffic Management," 2024 International Conference on E-mobility, Power Control and Smart Systems (ICEMPS), Thiruvananthapuram, India, 2024, pp. 1-6, doi: 10.1109/ICEMPS60684.2024.10559373.
 10. Z. Cao, L. Lu, C. Chen and X. Chen, "Modeling and Simulating Urban Traffic Flow Mixed with Regular and Connected Vehicles," in *IEEE Access*, vol. 9,