

Design of G+10 Storey Residential Building using STAAD.PRO

Atri Tyagi¹, Priyank Srivastava², Prashant Agarwal³, Anchal Negi⁴

¹⁻⁴ Assistant Professor, Civil engineering Dept., Ajay Kumar Garg
Engineering College, Ghaziabad, Uttar Pradesh, India

Abstract – The main aim of structural engineer is to design the structure for a safe, serviceable, durable and economical. The entire process of structural planning and design is required imaginations and sound knowledge. Analysis and design of G+10 storey residential building structure as per IS Code method. Analysis and design of entire structure have been completed by manual design and verifies using STAAD.PRO Software. All the drafting and detailing was done by using AutoCAD. In this project, the design of beam, column, slab, staircase, shear wall is calculated by “Limit State Method” using IS: 456-2000 code book. ^{Different} load active on the member are consider according to IS: 875-1987 (part 1, part 2) & IS: 1893-2005 for seismic load. Hence residential building is properly planned in accordance with Indian Standard Code of India.

Key Words: Analysis, Design, AutoCAD, STAAD.PRO, Residential building, Dynamic load, Static load.

1. INTRODUCTION

India is a developing country; huge construction projects are yet to come as undeveloped cities are needed to develop since so many years. In current century, many projects all over the world are going on, time delay takes place which in turn affects the growth of the construction of huge projects. To avoid time delay and thereby the growth, economic construction methodology should be adopted. To economize the structure, structural optimization techniques should be used. Many metropolitan cities are facing vast growth of infrastructure whether it may be in terms of horizontal development or vertical development. In high rise buildings, we should concern about all the forces that act on building, its weight as well as the soil behavior. For loose soil, we preferred deep foundation(pile). Calculation for high rise construction manually then it will take extra time in addition to human individual errors possibly will occurred. The software's used in this project are.

- AutoCAD
- STAAD.PRO

1.1 AutoCAD

AutoCAD is a drafting software which is used for developing 2-Dimensional and 3-Dimensional structures, developed and sold by Autodesk Inc. It is a vector graphics drawing program. AutoCAD's native file format DWG and to a lesser extent, its interchange file format, DXF.

1.2 STAAD.PRO

STAAD.PRO is user friendly software which is used for analysing and designing of structures by structural engineers. STAAD.PRO provides a lot of precise and correct results than manual techniques. STAAD.PRO software is used for both static and dynamic analysis for structures such as bridges, low rise or high-rise buildings, stadiums, steel structures etc. First step in STAAD.PRO is to specify the geometry of the structures and then the properties of the members are mentioned, then the supports are generated and loadings are specified on the structure. Finally, the structure is analysed.

2. LITERATURE REVIEW

Ibrahim, et al (April 2019): Design and Analysis of Residential Building(G+4):

After analyzing the G+4 storey residential building structure, conducted that the structure is rate in loading like dead load, live load, wind load and seismic loads. Member dimensions are assigned by calculating the load type and its quantity applied on it. Auto CAD gives detailed information at the structural member's length, height, depth, size and numbers etc. STAAD.PRO has a capability to calculate the program contains number of parameters which are designed as per IS:456-2000. Beams were designed for flexure, shear and tension and it gives the detail number, position and spacing brief.

Devi Krishna Chaitanya, et al (January 2017): Analysis and Design of a (G+6) Multi storey Building using STAAD.PRO:

They used static Indeterminacy methods to calculate numbers of unknown forces. Distributing known fixed end moments, the condition of compatibility by iteration method, Kani's method was used to distribute moments at successor joints in frame and continues beam for stability of members of building structure. They used to design software STAAD.PRO which reduced a lot of time in design, gives accuracy.

R. D. Deshpande, et al (June 2017): Analysis, Design and Estimation of B+G+2 Residential Building:

They found that check for deflection was safe. They carried design and analysis of G+2 residential building by using Etabs software with the estimation of building by

methods of center line. They safely designed column using SP-16 checked with interaction formula.

3. Building Description:

Purpose of Building	Residential
Shape of the Building	Regular (Rectangular)
No. of Stories	(G+10) Storey
Height of Stories	3.5 m (Similar)
Type of Wall	Brick Wall
Area of Building	228 m ²
Area	Bareilly, UP
Zone	IV
Zone Factor	0.24

Table.1

4. Floor Plan of building:

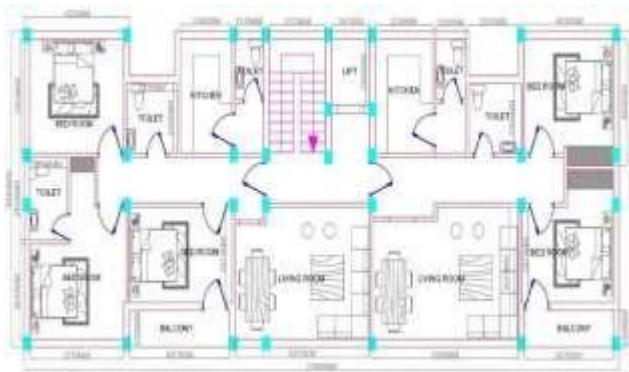


Fig.1: floor plan of building

5. Flow chart diagram:

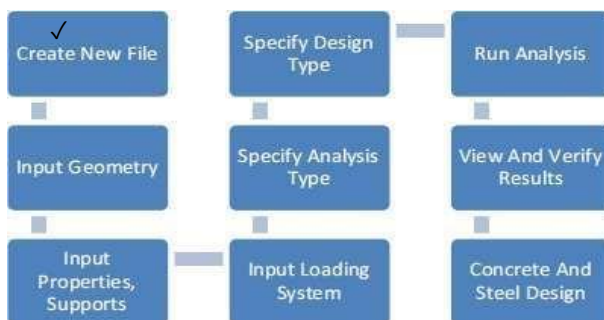


Fig.2: flow chart diagram

6. Methodology:

6.1 Modelling of Structure:

- ✓ G+10 Residential

6.2. Loads Assigning:

- ✓ Seismic load

Dead load

- ✓ Live load
- ✓ Combination of loads
 - D.L + L.L
 - 1.5 (D.L + L.L)
 - 1.2 (D.L + L.L ± EQ)
 - 1.5 (D.L ± EQ)
 - 0.9D.L ± 1.5EQ

6.3. Analysis & interpret the result:

- ✓ Analysis of RCC framed structure
- ✓ Shear force, Bending moment and Axial force
- ✓ Design of this structure as per guidelines of IS:456-2000(Limit state design)

6.4. Design:

- ✓ Design of Slab
- ✓ Design of Beam
- ✓ Design of Column
- ✓ Shear Wall: 150mm & Staircase

6.5. Input data:

- ✓ Slab =150mm
- ✓ Beam =300mm X 350mm
- ✓ Column =300mm X 400mm
- ✓ Thickness of outer wall = 230mm
- ✓ Thickness of inner wall = 115mm
- ✓ Height of parapet wall =1 m

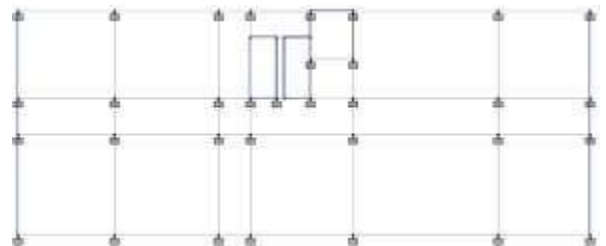


fig.3: Top View Model

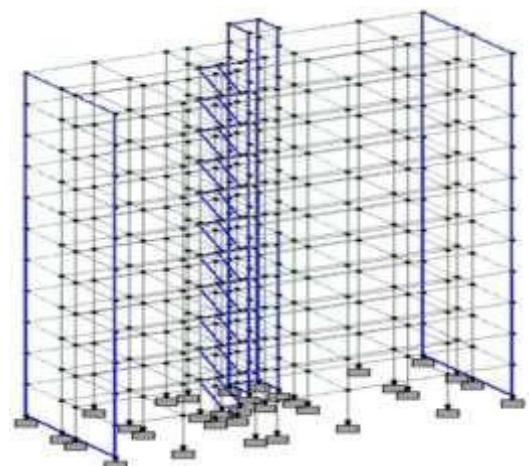


fig.4: 3-D View Model

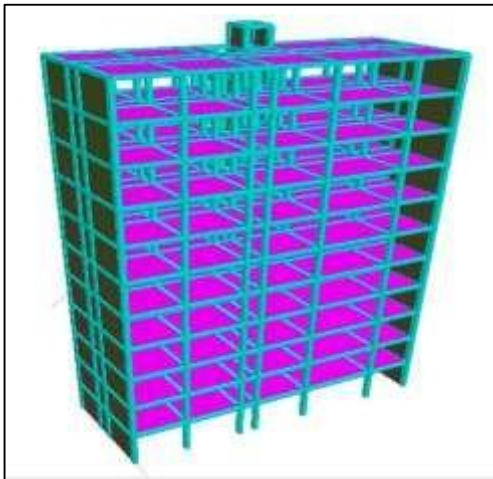


fig.5: 3-D Rendered View

7. Assigning of Loads:

7.1. Seismic load:(IS: 1893-2002/2005)

Zone: IV
 Zone factor: 0.24
 Damping ratio: 0.05
 Period in X direction: 0.58 seconds
 Period in Z direction: 1.05 seconds
 Response reduction factor: 5
 Soil type: 2(medium)

- ✓ Unit weight of concrete= 25
- ✓ Unit weight of mortar= 18
- ✓ Unit weight of brick masonry= 20

7.2. Dead load: (IS:875(PART 1))

7.2.1. Due to self-weight of slab:

Thickness of slab= 150mm
 Slab load per m =thickness X unit weight
 $=0.150 \times 25 = 3.75 \text{ KN/m}^2$
 Floor finished load per m = 1.5 KN/m²

7.2.2. Due to outer-wall:

✓ Thickness of outer wall =230mm (9 inch)
 Outer wall load = Thickness X unit weight X (height of typical storey – depth of beam)
 $=0.230 \times 20 \times (3.5-0.35)$
 $=14.49 \text{ KN/m}^2$
 (Plaster of two faces= $2[0.02 \times (3.5-0.35) \times 18]$
 $=2.268 \text{ KN/m}^2$)
 Outer wall load= $14.49+2.268=16.758 \text{ KN/m}^2$

7.2.3. Due to inner wall:

- ✓ Thickness of inner wall = 115mm (4.5 inch) Inner wall load= $0.115 \times 20 \times (3.5-0.35)$
 $=7.245 \text{ KN/m}^2 + 2.268 \text{ KN/m}^2 = 9.513 \text{ KN/m}^2$

7.2.4. Due to parapet wall:

- ✓ Thickness of parapet wall= 127mm (5 inch) Parapet wall load= $0.127 \times 20 \times 1 = 2.54 \text{ KN/m}^2$

7.3. Live load: (IS:875(PART 2))

Area	Live load (KN/m ²)
Bedroom & Kitchen	2
Toilet & Bathroom	2
Dining & Drawing Place	2
Staircase	3
Lift	4

Table.2

Live load= 2.5 KN/m²
 Roof live load= 2 KN/m²

7.4. Load combinations:

For Superstructure	For Substructure
1.5(D. L+L.L)	D.L+L.L
1.2(D. L+L.L±EQ (X, Z))	D.L+0.5L. L±EQ (X, Z)
1.5(D. L±EQ (X, Z))	D.L±EQ (X, Z)
0.9D. L±1.5EQ (X, Z)	

Table.3

8. Analysis & interpret the result:

8.1. Interpreting the displacement




fig.6: due to EQ in X-dirⁿ




fig.7: due to EQ in Z-dirⁿ

8.2. Interpreting the Bending Moment

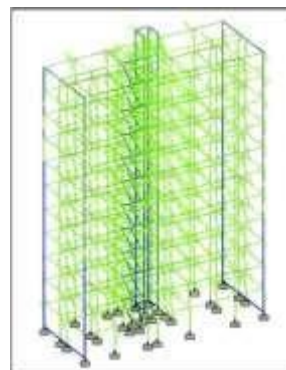


fig.8: due to EQ in X-dirⁿ

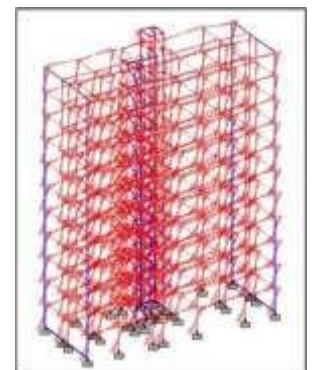


fig.9: due to EQ in Z-dirⁿ

8.3. Interpreting the Shear Force

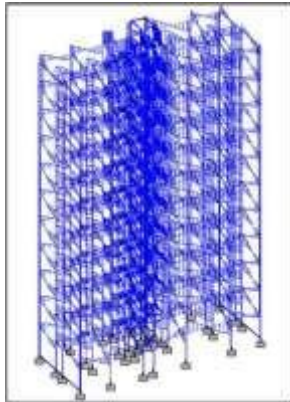


fig.10: due to EQ in Y -dirⁿ

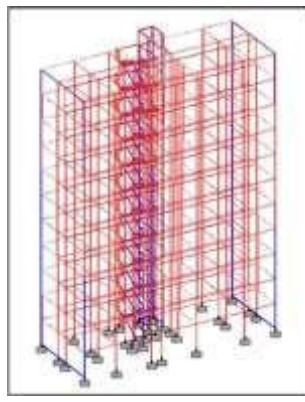


fig.11: due to EQ in Z-dirⁿ

8.4. Interpreting the Axial Force

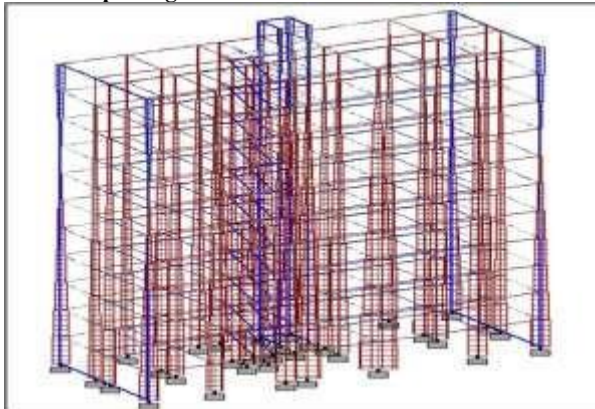


fig.12

9. Design of the structure:

- ✓ Design of Slab
- ✓ Design of Beam
- ✓ Design of Column
- ✓ Design of Shear wall

9.1. Design of Slab

Slabs are most widely used structural elements forming floor and roof of building. Slab supports mainly transverse load and transfer them to supports by bending actions in both the directions. On the basis of spanning direction, it is of two types.

- One-way Slab
- Two-way Slab

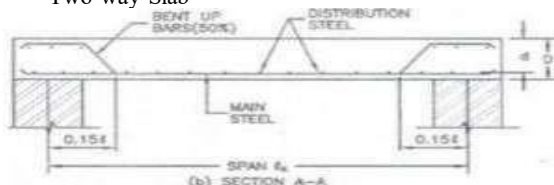


Fig.14: Slab reinforcement

Material Specification

Grade of Concrete, M30	30 N/mm ²
Grade of Steel, Fe415	415 N/mm ²
Clear Cover of Slab, Beam	25 mm
Clear Cover of Column	40 mm

Table.4

9.2. Design of Beam

- Singly reinforced beam
- Doubly reinforced beam

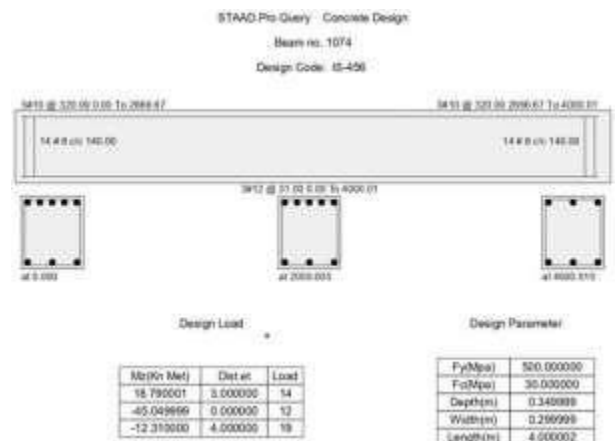


fig.15: Beam design

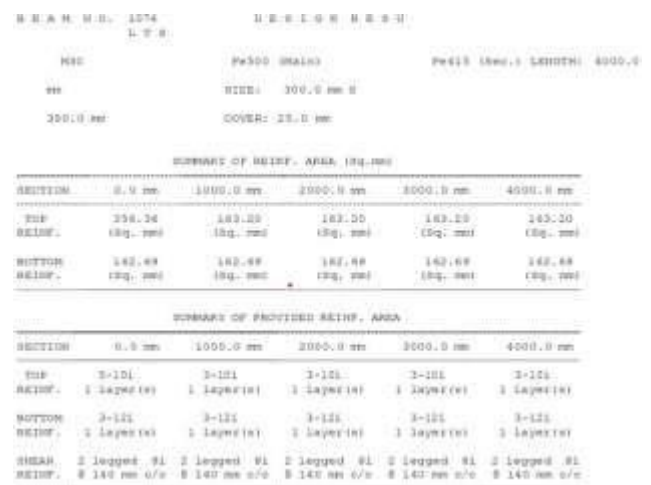


Fig.16: Detailing of beam


9.3. Design of Column

A column may be defined as an element used primarily to support axial compressive loads and with a height of at least three times its lateral dimension. The strength of column depends upon the strength of materials, shape, size of cross section, length and degree of proportional and dedicational restraints at its ends.

STAAD.Pro Query Concrete Design

Beam no. 59

Design Code: IS-456



Design Load

Load	1
Location	End 1
Pu(Kns)	-162.839996
Mx(Kns-M)	40.299999
My(Kns-M)	3.710000

Design Results


Fy(Mpa)	500
Fc(Mpa)	30
As Reqd(mm²)	1248.000000
As (%)	1.131000
Bar Size	12
Bar No	12

fig.17: Column design

STAAD.Pro Query Concrete Design

Beam no. 79

Design Code: IS-456



Design Load

Load	8
Location	End 1
Pu(Kns)	1496.910034
Mx(Kns-M)	58.220001
My(Kns-M)	10.880000

Design Results

Fy(Mpa)	500
Fc(Mpa)	30
As Reqd(mm²)	1432.000000
As (%)	1.340000
Bar Size	16
Bar No	8

fig.19: Column Design

COLUMN NO. 59 DESIGN RE

RESULTS

NO. Fe500 (Main) Fe415 (Sec.) LENGTH: 3500.0

mm CROSS SECTION: 400.0 mm X

300.0 mm COVER: 40.0 mm

** GUIDING LOAD CASE: 1 END JOINT: 1 TENSION COLUMN

REQD. STEEL AREA : 1248.00 Sq.mm. REQD. CONCRETE AREA: 116752.00 Sq.mm.

MAIN REINFORCEMENT : Provide 12 - 12 dia. (1.13%, 1357.17 Sq.mm.)
(Equally distributed)

TIE REINFORCEMENT : Provide 8 mm dia. rectangular ties @ 190 mm c/c

SECTION CAPACITY BASED ON REINFORCEMENT REQUIRED (KNS-MET)

Px : 2071.15 Mx1 : 45.07 My1 : 62.86

INTERACTION RATIO: 0.85 (as per CL)

19.6, 19456/2000) SECTION CAPACITY

BASED ON REINFORCEMENT PROVIDED

(KNS-MET)

WORST LOAD CASE: 1

END JOINT: 1 Px : 2110.82 Mx : 49.86 My : 49.91 IR: 0.86

fig.18: Detailing of column

COLUMN NO. 79 DESIGN RE

RESULTS

NO. Fe500 (Main) Fe415 (Sec.) LENGTH: 3500.0

mm CROSS SECTION: 400.0 mm X

300.0 mm COVER: 40.0 mm

** GUIDING LOAD CASE: 8 END JOINT: 23 SHORT COLUMN

REQD. STEEL AREA : 1432.00 Sq.mm. REQD. CONCRETE AREA: 116567.98 Sq.mm.

MAIN REINFORCEMENT : Provide 8 - 16 dia. (1.34%, 1498.50 Sq.mm.)
(Equally distributed)

TIE REINFORCEMENT : Provide 8 mm dia. rectangular ties @ 255 mm c/c

SECTION CAPACITY BASED ON REINFORCEMENT REQUIRED (KNS-MET)

Px : 2137.67 Mx1 : 47.97 My1 : 69.21

INTERACTION RATIO: 0.38 (as per CL)

19.6, 19456/2000) SECTION CAPACITY

BASED ON REINFORCEMENT PROVIDED

(KNS-MET)

WORST LOAD CASE: 8

END JOINT: 23 Px : 2291.47 Mx : 69.50 My : 98.12 IR: 0.85

fig.20: Detailing of column

9.3.1. Column Dimension:

Column Shape	Rectangular
Column length -X (Pl)	0.400 m
Column Width -X (Pw)	0.300 m

Table.6

9.3.2. Design Parameters:

Unit weight of Concrete	25 KN/m ³
Strength of Concrete	25 N/mm ²
Yield Strength of Steel	500 N/mm ²
Minimum Bar Size	08 mm
Maximum Bar Size	20 mm
Minimum Bar Spacing	190 mm
Maximum Bar Spacing	500 mm
Column Clear Cover	40 mm
Slab Clear Cover	20 mm

Table.7

9.3.3. Soil Properties:

Soil type	Drained
Unit weight	22 KN/m ³
Soil Bearing Capacity	150 KN/m ²

Table.8

10. CONCLUSIONS

On the following work carried out, we conclude that: -

1. This project has given an opportunity to re-collect and coordinate the various methods of designing and engineering principles which we have learnt.
2. Analysis and designing were done by using STAAD.PRO software and successfully verified manually as per IS: 456-2000.
3. Calculation by both manually as well as software analysis, gives almost same result.
4. Percentage of steel required in column is 0.82 to 3.14.
5. Displacement Increases as the storey height increases.
6. Maximum deflection in Horizontal (X-direction) is **49.756 mm**.
7. Maximum deflection in Horizontal (Z-direction) is **45.349 mm**.
8. Maximum deflection in Vertical (Y-direction) is 5.702 mm.
9. Maximum rotation in X, Y, Z- directions are 0.005 rad, 0.001 rad, 0.003 rad respectively.
10. Maximum & Minimum Bending Moment in Z- direction are **277.68 KN-m** & **-228.45 KN-m**.

11. Maximum & Minimum Shear Force in Y-direction are **198.77 KN** & **-157.74 KN**.

12. Maximum & Minimum Axial Force in X-direction are 4694.68 KN & -654.92 KN.

REFERENCES

- [1] Theory of structure by Ramamurtham for literature review on kani' method.
- [2] Theory of structure by SS Bhavi Katti for literature review on moment distribution method.
- [3] Reinforced Concrete structure by A.K Jain and B.C Punmia for design of beams, column and slabs.
- [4] IS:456-2000, Code of practice for plain and reinforced concrete.
- [5] IS:875-1987(part 1), Code of practice for design Dead loads.
- [6] IS:875-1987(part 2), Code of practice for design Imposed loads.
- [7] SP-16 Code, for design of columns.
- [8] V S Sateesh et al "Analysis of G+10 residential building by STAAD.PRO." IJITE- 2020
- [9] Arjun Sahu et al "Design and analysis of multistorey (G+3) residential building using STAAD.PRO."
- [10] Sreeshna K.S, 'Analysis and design of an apartment building', IJISET – International Journal of Innovative Science, Engineering & Technology, Vol. 3 Issue 3, ISSN 2348-7968, March 2016.