

PROGRESSIVE COLLAPSE ANALYSIS OF STEEL FRAME STRUCTURE IN EARTHQUAKE ZONE V

Mohammed Aamair Ameen, Jitesh Jagannath Dhule

Student, Structural Engineering, Trinity College of Engineering & Research, Pune.

Asst. Professor, Civil Engineering, Trinity College of Engineering & Research, Pune.

Abstract – This research study investigates the structural potential to fail due to progressive collapse of steel structure in zone V according to IS 1893-2002 under the guideline of GSA. Progressive collapse of structures is initiated by the loss of one or more load-carrying members. As a result, the structure will seek alternate load paths to transfer the load to structural elements, which may or may not have been designed to resist the additional loads. Failure of overloaded structural elements will cause further redistribution of loads, a process that may continue until stable equilibrium is reached. Equilibrium may be reached when a substantial part of the structure has already collapsed. The resulting overall damage may be disproportionate to the damage in the local region near the lost member. Loss of primary members and the ensuing progressive collapse are dynamic nonlinear processes.

Key Words: GSA, Alternate load path, Progressive collapse, Dynamic nonlinear, etc.

1. INTRODUCTION

Progressive collapse implies disproportional global structural system failure originated by local structural damage. It is a rare event, as it necessitates an initiation of local element removal criteria either due to the inevitable forces of Nature or due to manmade hazards. The gravity load of the structure is now transferred to neighboring columns; these columns should resist the additional abnormal gravity loads & redistribute loads to avoid failure of the major part of the structure. Present day structure design practices & lesser integral ductility and continuity, gets more prone to progressive collapse. However, there should be certain provisions needed for additional consideration to ascertain the safety of structure after any local failure.

These events define the progressive collapse very well. The provision of the range & type of progressive collapse in different situation provides much important information with particular regard to progressive collapse resistance, by complementing additional measures in the design. In order to secure structural safety against progressive collapse additional considerations such as abnormal loadings must be taken. The abnormal loads arise from vast sources such as explosion of gas, vapor inferno or confined dust, malfunctioning of machines, bomb explosion, the sudden impact of vehicles, etc. Nevertheless, till date, there are no adequate tools that can analyze the progressive collapse with satisfactory reliability.

In this topic study, the behavior of Steel framed structures to progressive collapse located in different seismic zones is investigated. A Structure with 20 stories is analyzed

for different seismic zones. As per the provisions of GSA guidelines.

1.1 Progressive Collapse: -

A structure undergoes Progressive Collapse when a primary structural element fails, resulting in the failure of adjoining structural elements, which in turn causes further structural failure. It is sometimes also called a disproportionate collapse, which is defined as a structural collapse disproportionate to the cause of the collapse. As the small structural element fails, it initiates a chain reaction that causes other structural elements to fail in a domino effect, creating a larger and more destructive collapse of the structure. A good example of progressive collapse is a house of cards; if one card falls near the top, it causes multiple cards to fall below it due to the impact of the first card, resulting in full collapse of the house of cards.

2. OBJECTIVE

1. To determine type of failure and critical section due to earthquake loading for earthquake zone V under the guideline of GSA for progressive collapse.
2. To determine the effects on structure caused due to sudden failure of axial member.
3. To decide suitable combination of structure for construction of high rise building by comparing with similar R.C.C. building.
4. To study the response of steel structure for various parameters such as Demand Capacity Ratio, Bending moment, Deflection, Story Drift and cross checking with similar R.C.C. structure.
 - Study of Progressive collapse analysis for steel structure.
 - Discuss guidelines for column removals in structure.
 - Modeling & Analysis of a high-rise steel frame structure using E-TABS.

3. LIMITATIONS

- The conclusion which is derived from this project is only for steel structures, as model in this project is considered to be steel frame structure.
- Analysis done in this project is only for G+20 structures made of only steel section.
- Results obtained from this project are only valid for G+20 structures.
- Results varies as per location of structure for example change in location of structure may change design of structure due to earthquake load or wind load.

- Model selected for structure have specific dimension any change in dimension will change the analysis and hence result of the project.

4. METHODOLOGY

This chapter describes various methods and approaches used for analysis and design of structure. The present study is carried out on analysis and design of high-rise steel building using ETABS 2015 software. Modeling of G+20 story structure is done in ETABS 2015. The models are analyzed and designed for design loading and load combinations.

4.1. Types of Analysis

4.1.1. Linear Static Analysis

- First, the building is analyzed with the gravity load (Dead Load+ Live Load) ... (Eq. 1) and obtains the output results for moment and shear without removing any column.
- Now remove a vertical support (column) from the position under consideration and carry out a linear static analysis to the altered structure and load this model with 2 {Dead Load + 0.25 Live Load} (Eq. 2)
- The static load combinations were entered into the ETABS 2015V 15.0 program and a model of the structure was generated. An ETABS 2015 computer simulation was executed for each case of different Column removal location on the model and the result are reviewed.
- Further, from the analysis results obtained, if the DCR for any member end connection or along the span itself is exceeded the allowable limit based upon moment and shear force, the member is expected as a failed member.
- If DCR value surpasses its criteria then it will lead to progressive collapse.

4.1.2. Dynamic Analysis

- Static Studies assumes that loads are constant or applied very slowly until they reach their full values. Because of this assumption, the velocity and acceleration of each particle of the model is assumed to be zero. As a result, static studies neglect inertial and damping forces.
- For many practical cases, loads are not applied slowly or they change with time or frequency. For such cases, use a dynamic study. Generally, if the frequency of a load is a larger than 1/3 of the lowest (fundamentals) frequency, a dynamic study should be used.
- Linear dynamic studies are based on frequency studies. The software calculates the responses of the model by accumulating the contribution of each model to the loading environment. In most cases, only the lower models contribute significantly to the responses. The contribution of a mode depends on the loads frequency content, magnitude, direction, duration and location.

The design procedures given by GSA (General Services Administration, 1949) Guidelines aim to reduce the potential for progressive collapse by bridging over the loss of a structural element, limiting the extent of damage to a localized

area (Alternate Path) and providing a redundant and balanced structural system along the height of the building.

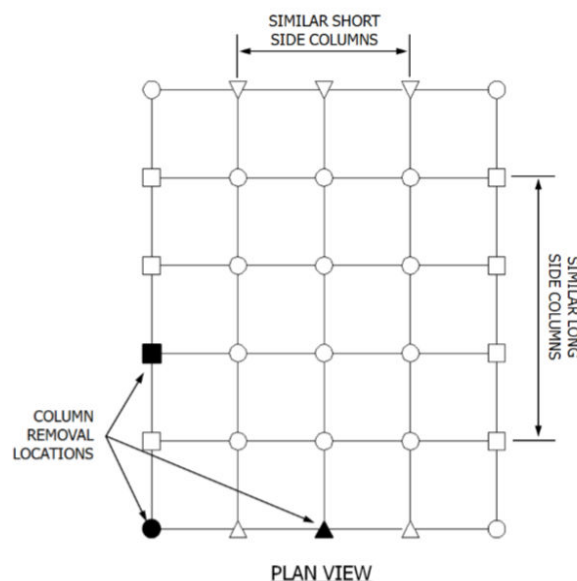


Fig 4.1 Location of External Column Removal

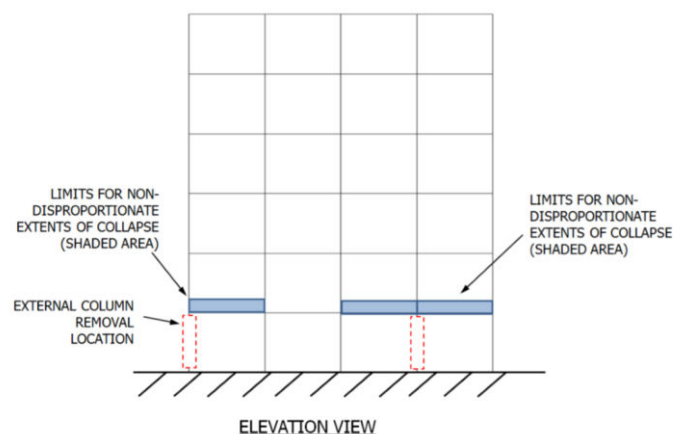


Fig 4.2 Allowable Extents of Collapse for Interior and Exterior Column Removal in Elevation

Table No. 4.1 Preliminary data required for analysis (Validation)

Sr. No.	Particulars	Details
1	Type of Structure	High Rise Steel Frame Structure
2	Type of building	Public building
2	Seismic Zone	(IS:1893-2002) Zone V
3	Number of Stories	G+20
4	Floor Height	3000 mm
5	Spacing of grid	5000 mm in both direction
6	Imposed load	2.5 KN/m ²
7	Floor Finish	1.25 KN/m ²
8	Wall Load	10 KN/m ²
9	Wall Load at Roof	3 KN/m ²
10	Materials	Concrete M25, Reinforcement Fe 415 &

		Structural steel (Fy-345)
11	Depth of slab	150 mm thick

6. ANALYSIS RESULT

6.1 For Seismic Zone V: Analysis for the sudden loss of a column situated at the corner of building.

Case 1: Column C1 Remove at ground floor.

Table 6.1 Demand capacity ratio of column – C1

Sr. No	Before PC	After PC
1	0.519	0
2	0.878	0.178
3	0.811	0.076
4	0.68	0.09
5	1.01	0.107
6	0.671	0.243
7	0.623	0.386
8	0.648	0.384
9	0.635	0.415
10	0.601	0.413
11	0.652	0.427
12	0.585	0.359
13	0.556	0.465
14	0.755	0.572
15	0.673	0.534
16	0.523	0.274
17	0.463	0.273
18	0.527	0.257
19	0.531	0.37
20	0.449	0.378

Table 6.2 Demand capacity ratio of column – C2

Sr. No	Before PC	After PC
1	0.657	0.695
2	0.713	0.932
3	0.909	1.153
4	0.825	1.049
5	0.794	0.98
6	0.683	0.877
7	0.746	0.966
8	0.768	0.934
9	0.748	0.87
10	0.707	0.795
11	0.663	0.734
12	0.595	0.655
13	0.58	0.607
14	0.792	0.794
15	0.866	0.385

16	0.711	0.676
17	0.609	0.594
18	0.565	0.509
19	0.565	0.56
20	0.52	0.513

Table 6.3 Demand capacity ratio of column – B1

Sr. No	Before PC	After PC
1	0.494	1.54
2	0.548	1.456
3	0.582	1.343
4	0.612	1.24
5	0.632	1.179
6	0.527	1.537
7	0.538	1.404
8	0.577	1.262
9	0.624	1.917
10	0.627	1.757
11	0.687	1.801
12	0.626	1.668
13	0.604	1.574
14	0.557	1.374
15	0.707	1.63
16	0.671	1.554
17	0.624	1.525
18	0.594	1.458
19	0.389	1.033
20	0.556	1.273

Table 6.4 Axial Force of column - C1

Sr. No.	Before PC	After PC
1	-2984.3491	0
2	-2845.6278	-30.4496
3	-2705.1318	-47.1643
4	-2561.0592	-49.7980
5	-2414.1148	-41.0231
6	-2272.2884	-29.3636
7	-2119.1279	-184.0074
8	-1964.4963	-305.2092
9	-1808.6515	-395.9780
10	-1649.3612	-475.9979
11	-1488.7317	-537.1427
12	-1334.8382	-536.4470
13	-1173.5790	-579.6265
14	-1013.5980	-603.1967
15	-858.9983	-594.5211
16	-713.3261	-505.5732
17	-566.6691	-408.5052
18	-420.8595	-307.9823
19	-280.4382	-201.3710
20	-131.5210	-126.6569

Table 6.5 Axial Force of column - C2

Sr. No.	Before PC	After PC
1	-4419.5443	-7059.0575
2	-4195.3987	-6680.0131
3	-3968.3430	-6302.8754
4	-3747.0344	-5940.6856
5	-3526.6313	-5588.7475
6	-3303.3583	-5242.4533
7	-3082.8293	-4808.0454
8	-2864.5932	-4392.4013
9	-2645.8620	-3991.3652
10	-2426.3777	-3595.3429
11	-2205.8700	-3211.5276
12	-1984.2614	-2861.2204
13	-1760.9044	-2485.9795
14	-1537.8776	-2119.6721
15	-1320.2463	-1773.4058
16	-1098.1538	-1476.2331
17	-874.9203	-1182.8970
18	-650.2122	-890.6506
19	-427.1543	-599.4942
20	-213.3389	-285.7741

Table 6.7 Shear Force of Beam – B1

SR NO	Before PC	After PC
1	59.7191	214.1974
2	60.6094	212.4175
3	62.402	206.148
4	63.842	200.4379
5	84.49	196.769
6	70.1843	280.5768
7	71.1547	264.7776
8	72.1515	250.3533
9	73.8854	244.9612
10	74.5658	235.5476
11	71.883	203.7277
12	75.6818	226.184
13	74.621	216.4756
14	72.5977	199.4478
15	68.5525	158.9419
16	69.04	154.7869
17	68.7668	152.9033
18	66.9936	149.395
19	71.2116	166.9587
20	62.4387	140.2364

Table 6.6 Maximum Bending Moments of Beam - B1.

Sr. No.	Before PC	After PC
1	45.4528	343.4403
2	47.5916	336.7745
3	51.7648	325.0049
4	54.9241	312.2664
5	56.5998	304.4569
6	68.3265	497.9329
7	70.7054	462.4171
8	73.2746	432.5161
9	77.6009	419.1889
10	78.7481	398.3663
11	73.2448	323.5238
12	75.6818	378.9385
13	78.2223	348.7001
14	72.7901	307.4566
15	66.0551	216.1341
16	67.3923	206.0662
17	65.6726	2021.8534
18	59.9548	191.9021
19	67.7122	229.047
20	45.7047	162.8348

7. CONCLUSION

After the study of response of G + 20 steel structure in ETABS for Progressive collapse considering various parameters like Demand Capacity Ratio, Bending Moment, Shear Stress and Axial Forces on columns and comparing with similar R.C.C. structure, we came to the following conclusion that:

- When any Column of ground floor fails due to earthquake loading, most of the columns above that member fails the check for demand capacity ratio as the axial forces increases drastically.
- Due to sudden removal of specific column, the surrounding columns gets affected and there is an increase in axial forces of about 20% to 25% accordingly.
- Due to the sudden failure/removal of column, the surrounding beams are also affected resulting in an increase in Maximum Bending Moment of about 5 times of which acting before Collapse of axial member.
- There is an increase in shear forces in surrounding beams of about 50% to 65% near the failed column.
- The steel structure does not show sudden failure as compared to similar R.C.C. structure as the plasticity state of steel is being used after elastic limit. The Plastic limit of R.C.C. structure is relatively low as compared to steel structure.
- The retrofitting of failed members in steel structure is comparatively easy rather than R.C.C. structure.

Hence, preferring steel structure for high rise building in higher seismic zones like zone V rather than R.C.C. structure is a safer.

ACKNOWLEDGEMENT

Words are inadequate to express my deep sense of gratitude to **Prof. Mr. Jitesh Jagannath Dhule**. My Guide for his consistent guidance & inspiration throughout the Project work. I owe sincere thanks, more than what I can express, towards **Prof. Mr. V. S. Shingade**, Head of Civil Engineering Dept. TCOER, Pune and **Prof. P. M. Kulkarni**. As all the success is the result of his affectionate encouragement. I am grateful to my **Principal Prof. A. B. AUTI** for his encouragement and guidance throughout the master of engineering course. I am expressing my sincere thanks to all the staff and colleagues who have helped me directly or indirectly in completing this Project. I am grateful for the many useful comments and suggestions provided by reviewers, which have resulted significant improvements in Project.

I express my special thanks to all the colleagues of our department for their cooperation. I also cannot forget the support of my family member and friends during the completion of this work

Lastly, I am thankful to those who directly and indirectly helped me and supported me to complete this work.

REFERENCES

1. Syed Asaad Mohiuddin Bukhari, Shivaraju G D, Ashfaqe Ahmed Khan (June 2015) "Analysis of progressive collapse in RC frame structure for different seismic zones". International Journal Of Engineering Sciences & Research Technology.
2. Harinadha Babu Raparla, Pradeep Kumar Ramancharla (May 2015), "Progressive collapse analysis of RC buildings subjected to seismic loads". The Indian Concrete Journal. Report No: IIIT/TR/2015/-1.
3. H.R. Tavakoli, A. Rashidi Alashti & G.R. Abdollahzadeh, "3-D NONLINEAR STATIC PROGRESSIVE COLLAPSE ANALYSIS OF MULTI-STORY STEEL BRACED BUILDINGS". 15WCEE (LISBO 2012).
4. Farshad Hashemi Rezvani, Majid Mohammadi Gh. Shahria Alam, "SEISMIC PROGRESSIVE COLLAPSE ANALYSIS OF CONCENTRICALLY BRACED FRAMES THROUGH INCREMENTAL DYNAMIC ANALYSIS". 15WCEE (LISBO 2012).
5. S. M. Marjanishvili, P.E., M.ASCE, "PROGRESSIVE ANALYSIS PROCEDURE FOR PROGRESSIVE COLLAPSE". Journal of Performance Of Constructed Facilities © ASCE/ May 2004.
6. Osama A. Mohamed, P.E., M.ASCE. "PROGRESSIVE COLLAPSE OF STRUCTURES: ANNOTATED BIBLIOGRAPHY AND COMPARISON OF CODES AND STANDARDS". Journal of Performance Of Constructed Facilities © ASCE / November 2006.
7. M. C. M. Bakker, J. G. M. Kerstens, J. Weerheijm. "Dynamic Response of High-rise Building Structures".
8. Azlan Bin Adnan, Iman Faridmehr, Babak Faramanbordar, Reza Hodjati and Mohammad Gharehzadeh Shirazi, A.B.A. Rahman "ASSESSMENT THE BEHAVIOUR OF SEISMIC DESIGNED STEEL MOMENT FRAMES SUBJECTED TO PROGRESSIVE COLLAPSE".(2005)
9. GSA, "Progressive Collapse Analysis and Design Guidelines for New Federal Office Buildings and Major Modernization Projects," The US General Services Administration, 2003.
10. Ellingwood, B. R.; Leyendecker, E.V.() H.R.Tavakoli*,A.Rashidi Alashti1(2012), Evaluation of progressive collapse potential of multi-story moment resisting steel frame buildings under lateral loading, Scientia Iranica A(2013)20(1),77–86
11. G. Tarța and A. Pintea, (2012) Seismic evaluation of multi-storey moment-resisting steel frames with stiffness irregularities using standard and advanced pushover methods, Procedia Engineering 40 (2012) 445 – 450
12. KhandelwalKapil, El-TawilSherif, SadekFahim(2009). Progressive collapse analysis of seismically designed steel braced frames. J Constr Steel Res;65:699–708
13. H. R. Tavakoli, F. Kiakojouri, IJE TRANSACTIONS A: Basics Vol. 26, No. 7, (July 2013) 685-692
14. Kamel Sayed Kandil, Ehab Abd El Fattah Ellobody, Hanady Eldehemy, World Journal of Engineering and Technology, 2013, 1, 33-38 Published Online November 2013