

Review on Short Circuit Fault Detection and Protection of DC Microgrid

Nikhil Sonule

*PG Student, Department of Electrical Engineering
Abha Gaikwad-Patil College of Engineering, Nagpur*

Prof. Vaishali Madekar

*Project Guide, Department of Electrical Engineering
Abha Gaikwad-Patil College of Engineering, Nagpur*

Abstract— Due to inherent advantages of DC system over AC system such as compatibility with renewable energy sources, storage devices and modern loads, Direct Current Microgrid (DCMG) has been one of the key research areas from last few years. In the proposed work power has been produced by using solar pv and fuel cell which is combined on the same dc bus and given to adc load. DC microgrid protection is an important part of power system studies. The basic think which is required for protection is to get to know, where it should be provided and which component must be used. So, to address the challenges of dc microgrid protection accurate fault detection strategies, fault current limiting method and dc circuit breaker has been used. The electricity load of the microgrid is satisfied by the power form fuel cell, pv array and battery altogether. Initially battery is charged up to 70% and at this time bidirectional converter work asa boost converter and when battery discharges till 30 %, battery starts charging and then bi- directional converter act as buck converter and battery remain in charging mode.

Keywords: *Short Circuit , DC Microgrid, PV, MPPT, Battery etc.*

I. Introduction

A microgrid is a local electrical grid containing sources and loads. The microgrid is a cluster of distributed resources which have the ability to operate autonomously. Microgrids are being used to bring electricity into areas where transmission lines cannot reach. A traditional system with generation in one place and then distribution at high voltages is designed for high energy density fossil fuels. Distributed generation can be used to increase the reliability of a system and allow for the integration of renewables. Distributed generation is a much more suitable method of electricity distribution for renewables due to their lower energy density as compared to fossil fuels and since the power generation is on site losses due to transmitting electricity are proportionally eliminated. Energy storage can be used in microgrids to improve the power quality and smooth out the fluctuations of renewable energy generation. The recent trend in renewables is to use distributed power sources and energy storage to form a microgrid. DC microgrids are not very widespread but have

the potential to present many advantages in terms of facilitating renewable energy integration and improving power quality. DC microgrids usually contain distributed energy resources (DER), loads and energy storage. Renewable energy sources such as photovoltaic modules and wind turbines are typically connected to the DC bus via power electronic converters. These converters have the ability to control the output voltage of DER in order to stabilize the bus voltage and extract maximum power. There are power electronic converters that have the ability to increase or decrease the output voltage. DC loads can be directly connected to the DC bus and if an AC load is required an inverter would be needed in order to invert the DC bus voltage into a usable AC voltage. Batteries are typically used in DC microgrids due to their relatively cheap price and longer backup times. A longer backup time and low losses are desirable for energy storage technologies for microgrids which contain renewable energy generation in order for the load to be met. The problem with batteries is that their service life is relatively short and therefore they need to be changed out more often. Charge controllers are used in order to control the flow of power in the microgrid. Devices are needed to control when power is sent to the batteries or sent to power the load. These controllers also help to improve the power quality in the microgrid. Why fault occur in DC microgrid? Due to the low impedance nature of DC microgrid system, the capacitive filters associated with converters will rapidly discharge into a fault, resulting a large current surge within very shortduration.

II. Problem statement

The solution for the protection issues of the DC microgrid is not readily available by a conventional method, for certain reasons such as bidirectional power flow in the microgrids, by withdrawing the fault current during the islanded mode of operation, renewable energy resources characteristics and their types. Hence the main problem of DC Microgrid is the protection issues.

III. Objective

The objective of this thesis is to propose a model for short circuit fault detection and protection of DC microgrid consisting of renewable energy generation. A DC microgrid model has been designed and simulated that comprises a protection model for multiple energy sources and equipments. The components of the DC microgrid and the protective devices will be modelled then whole DC microgrid will finally be simulated.

IV. Literature Review

The paper titled as “Short Circuit Fault Analysis on Microgrid” 4th International conference on Renewable Energy Research and Application Palermo, Italy 25 November 2015 given by the author R. Bayindir, explains the protection of microgrid under short circuit fault and how we can protect our grid. And also, this paper explain brief about Solar PV and Wind turbine.

The paper titled as “DC short circuit fault analysis and protection of ring type DC microgrid” 2016 IEEE 8th International Conference on Power Electronics and Motion Control (IPEMC) given by the author Ming Yu Yi WangLirong ZhangZiguang Zhang, explains DC fault location and Protection of DC micro grid.

This paper explains how we can locate a fault in dc microgrid and protection against it. The paper titled as “Fault analysis and protection of a Dc microgrid” 2008 IEEE 40th North American Power Symposium by authors E. Sortomme, G.J. Mapes, B.A. Foster, S.S. Venkata explains brief about microgrid and fault analysis on microgrid

The paper titled as “Static modeling of microgrids for load flow and fault analysis” IEEE Transactions on Power Systems 32 (3), 1990-2000, 2016 given by authors Bulent Dağ, Ali Rıfat Boynueğri, Yavuz Ateş, Arif Karakaş, Abdullah Nadar, Mehmet Uzunoğlu explains brief about Fault analysis on microgrid, load flow analysis on microgrid and static modeling.

The paper titled as “Analysis on Performance of DC Microgrid under Fault Condition” American Scientific Research Journal for Engineering, Technology, and Sciences (ASRJETS) given by authors Ya Min Soea, Soe Sue Ei Aungb, Zar Linn explains about Distributed Generation and High-Quality Power.

The paper titled as “FCL location selection in large scale power system” IEEE Transactions on Applied Superconductivity; march 2001 given by authors M. Nagata, K. Tanaka, H. Taniguchi explains Impedance used in microgrid and brief about Current limiter.

The paper titled as “FCL location selection in large scale power system” 2001 IEEE Transactions on Applied Superconductivity given by authors M. Nagata; K. Tanaka; H. Taniguchi explains about fault current limiters and its types,

power distribution protection and power distribution reliability.

The paper titled as “MPPT techniques for PV systems” 2013 4th International Conference on Power Engineering, Energy and Electrical Drives given by authors Dalila Beriber; Abdelaziz Talha explain how mppt used in solar pv and explain P & O MPPT Algorithm.

The paper titled as “Improved Island Microgrid Fault Analysis by Considering the Effect of DG Control Methods” 2019 IEEE 2nd International Conference on Electronic Information and Communication Technology (ICEICT) given by authors Liang Ji; Haitao Zhang; Ling Mao; Jiabin Shi; Zhe Cao; Zeyu Ni; Xiaojie Tao explains about Voltage control, Inverters, Reactive power.

V. Methodology

DC microgrid is a super high quality electric power system with using dc distribution. The main components of a microgrid are: Distributed generation sources such as photovoltaic panels, wind turbines, fuel cells, diesel and gas micro turbines etc. Distributed energy storage devices such as batteries, ultra-capacitors, etc., In addition, several distributed generations are also connected to DC line in the system through DC/DC converter.

Photovoltaic system (PV) is connected to DC grid via DC-DC boost converter. The DC voltage is fixed 500V. The boost converter is controlled by Maximum Power Point Tracking (MPPT) to keep its efficiency high. MPPT technique is used to improve the efficiency of the solar panel. MPPT controller is based on the “incremental conductance” technique. And then, battery & fuel cell is connected to DC distribution line through DC/DC converter. DC microgrid distributes DC power that transmit load side. DC load is connected to the DC grid.

Faults in DC microgrid -

Most of the faults that occur on power system of overhead lines are unsymmetrical faults which may consist of single line to ground fault and line to line fault. In this paper, line to line fault is analyzed.

Line to line fault -

This is most harmful fault for the system than single line to ground fault. This fault is rarely occurring in the system. In overhead distribution lines, a double line fault occurs when objects falling across the positive and negative line and shorted them. In underground cables, this fault occurs because of insulation failure. Line to line fault between positive and negative line is shown in fig 3.1.

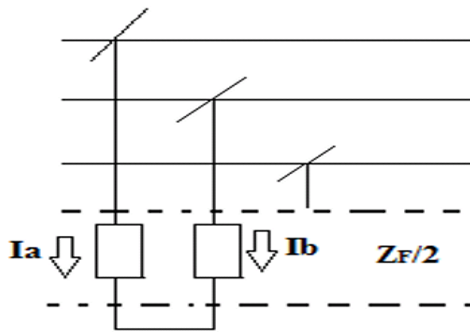


Figure 1 Line to line fault

In order to confirm the control strategies of the DC microgrid, computer simulations were carried out by using the MATLAB. The main parameters of this system show in Table 1 and the simulation circuit is shown in Figure 1.

Component	Rating
Solar PV	100 KW
Fuel cell	300 V, 80A
Battery	250V
Boost Converter	$C(i/p)=100\mu f, L=5mH, C(o/p)=12000\mu f$
Bidirectional Converter	$L=160.95mH, C=220\mu f$
Relay	250A, 90A, 7A
DC Load	100Ω

Table 1 Rating of components

In order to confirm the control strategies of the DC microgrid, computer simulation was carried out by using the MATLAB.

In this research, grid connected system is used. At the source side, photovoltaic source (PV) and fuel cell are demonstrated and the battery for back up is taken and DC loads is connected at the load side.

VI. Conclusion

A DC microgrid model has been designed and simulated that comprises a protection model for multiple energy sources. At the time equal to 0.5 the system detects the fault at PV array and with help of circuit breaker and relay the PV array is separated from the system immediately and at the time equal to 0.7 the PV array starts restoring. This model is used to protect the DC microgrid under short circuit fault. Whenever the fault occurs at any section of the DC microgrid then the system is protected against it rapidly using protective devices and also the system is restored quickly, maintaining the continuity of the power supply to the DC load. As a result of all these studies, its shown that the system has speed

respond time against faults. In DC microgrid time-based fault cannot be implemented directly in MATLAB, it must be developed in future. This model can be used for either industrial purpose or for any small-scale area.

References

- [1] Bayindir. R, ; 'Short circuit Fault on microgrid', 4th International conference on Renewable Energy Research and Application Palermo, Italy 25 November 2014.
- [2] YuYi Ming WangLirong ZhangZiguang Zhang, ; 'DC short circuit fault analysis and protection of ring type DC microgrid', 2016 IEEE 8th International Conference on Power Electronics and Motion Control (IPEMC).
- [3] Sortomme.E , Mapes G.J, Foster.S.S, Venkata.B.A ; ' Fault analysis and protection of a Dc microgrid', 2008 IEEE 40th North American Power Symposium.
- [4] Zongxiang.LU, Wang Caixia, Min Yong et al., ; 'Review of microgrid research', Automation of Electric Power Systems, vol. 31, no. 19, pp. 100-107, 2007.
- [5] Sanchez.S., and Molinas.M ; 'Degree of Influence of System States Transition on the Stability of a DC Microgrid', Smart Grid, IEEE Transactions on, 2014, 5, (5), pp. 2535-2542.
- [6] Dugan.R , McDermott.T ; 'Distributed generation', IEEE Ind. Appl. Mag., vol. 8, no. 2, pp 19-25, Mar./Apr. 2002.
- [7] Kakigano.H, Miura.Y, Ise.T, and Uchida.R, ; 'DC Voltage Control of the DC Micro-grid for Super High-Quality Distribution', The Fourth Power Conversion Conference, Japan, 2007, pp. 518-525.
- [8] Kakigano, Miura.Y, Ise.T, and Uchida.R, ; 'DC Micro-grid for Super High-Quality Distribution –System Configuration and Control of Distributed Generations and Energy Storage Devices', 37th Annual IEEE Power Electronics Specialist Conference (PESC), Korea, 2006.
- [9] Kakigano.H, Miura.Y, Ise.F, Momose.T and H. Hayakawa, ; 'Fundamental Characteristics of DC Microgrid for Residential Houses with Cogeneration System in Each House', IEEE Power & Energy Society 2008.
- [10] Kalyan Rote Sunil, Kulkarni J.S, ; 'Protection of Low Voltage DC Bus MicrogridsSystem', IEEE Trans. Power Del., vol. 3, Issue 7, July 2015.