

An Image Pre-Processing and Neural Network Approach for Crop Leaf Blight Detection

Shirin Mansuri¹, Prof. Pankaj Raghuwanshi²

Abstract: With machine learning being used in agricultural applications, a new domain of science has emerged which is termed as precision agriculture. It is the amalgamation of data science, analytics, AI and ML technologies for enhancing conventional agricultural practices. This paper addresses the challenge of identifying blight (late and early) based on a machine learning approach. In this approach, the image is first pre-processed to convert from RGB to Grayscale and subsequently denoised. Next the statistical features of the image are computed to train a machine learning models based on a probabilistic approach employing the Bayes Theorem of conditional probability. A penalty factor is included for the training purpose termed as regularization which optimise the weight updated mechanism. The final classification accuracy is computed based on the TP, TN, FP and FN rates which yield a classification accuracy of 97.69%.

Keywords— Potato Leaf Disease (blight), Image Denoising, Feature Extraction, Deep Neural Networks, Classification Accuracy.

1. INTRODUCTION

Machine learning and deep learning based approaches are being extensively used for identification of blight (early and late) in potato crops which happens to be a staple in various regions of the world. To automate the process of blight detection, machine learning and deep learning based approaches have been explored. An effective collection of tools for the early identification of potato leaf blight is provided by machine learning techniques. ML algorithms may be trained to discriminate between healthy and diseased potato leaf classes based on subtle visual signals including discolouration, lesions, and leaf morphology. This is accomplished by training models on massive datasets of labelled photos of potato leaves. Figures 1(a) and 1(b) depict the typical normal and blight infested images.



Fig.1(a) A typical healthy image



Fig.1(b) A typical blight image

A type of machine learning called deep learning has been a game changer for image analysis jobs, such as plant disease identification. One type of deep learning models called neural networks is particularly good at automatically learning hierarchical representations of picture features; this eliminates the requirement for feature extraction that is done by hand. However, completely bypassing the feature extraction part may have its own disadvantages which are:

1. Need to extensively copious datasets to effectively train deep learning models.
2. Lessened accuracy of classification due to variations in image texture and background.
3. Possibility of vanishing gradient and overfitting.

This is the reason why the proposed approach tries to incorporate image denoising (to filter out noise effects), feature extraction and subsequent classification using a deep neural network model.

2. METHODOLOGY

The proposed methodology consists of 3 major parts:

Image Pre-Processing
Image Feature Extraction
Classification

Pre-Processing: The pre-processing parts consists of the RGB to Grayscale conversion as well as denoising the image using the DWT. The mathematical analysis is presented here:

For the images, convert RGB to Grayscale using the following relation:

$$I_y = 0.333fr + 0.5fg + 0.1666fb \quad (1)$$

Where.

Fr, Fg and Fb are the intensity of R, G and B component respectively and
Iy is the intensity of equivalent gray level image of RGB image.

The benefit of this process is the fact that it converts the function of 3 variables to one variable and renders homogeneity.

The next step is the denoising of the image based on the DWT process which tries to filter out the image in the transform domain using wavelet decomposition. The approximate low frequency components are used to retain the actual information while the detailed high frequency components are discarded to remove noise effects.

Feature Extraction: The feature extraction process is necessary to compute important statistical features of the images for the final classification process. The features computed in this work are energy, mean, median, standard deviation, variance, entropy, skewness, kurtosis, contrast, correlation, homogeneity, smoothness and rms value. These feature are then then demarcated for the target variable. In order to overcome the difficulties associated with picture classification, the computation of image statistical features is essential. These features are vital for creating precise and dependable classification models because they capture important traits, improve discriminative power, guarantee robustness, and allow efficiency and interpretability. To fully realise the potential of picture-based classification systems, advanced feature extraction techniques must be included as we navigate the ever-expanding field of image analysis.

Final Classification: The final classification is based on the design of the deep neural network model which classifies the image as:

- A) Healthy
- B) Blight (early) or blight (late)

For this purpose, the computed and fed to the deep neural network. The image statistical features are measurable attributes that are taken from images and represent different facets of its texture, spatial relationships, and pixel intensity distribution. These characteristics enable efficient differentiation between several groups or categories by offering insightful information about the underlying patterns and structures inside images. Image statistical traits provide resilience against changes in lighting, noise, and geometric alterations. Higher-level properties that are more resistant to distortions are encoded via statistical features, in contrast to raw pixel values, which are susceptible to such alterations.

Classifiers generate succinct yet useful representations of visual content by computing statistical parameters including mean, variance, skewness, and kurtosis. These characteristics strengthen the discriminative ability of classification models by encapsulating important statistical characteristics that separate one class from another. As there is no clear demarcation among the normal and blighted potato leaf images, hence a probabilistic classifier is design and used for the final classification based on the Bayes Rule:

The weights of the network are updated such that the condition for maximization is satisfied of a new sample bearing a conditional probability defined as:

$$P\left(\frac{X}{X_i, k_1, k_2, M}\right) = \frac{P\left(\frac{X_i}{X, k_2, M}\right)P\left(\frac{X_i}{k_1, M}\right)}{P\left(\frac{X}{k_1, k_2, M}\right)} \quad (2)$$

Here,

P denotes the probability of occurrence of an event.

X_i denotes the vector corresponding to the bias and weight values of the network.

X denotes the training data set

The training rule for the approach is based on the Bayes theorem of conditional probability which is effective for classifying overlapping feature vectors, based on a penalty $\rho = \frac{\mu}{v}$. The weights are updated based on the modified regularized cost function:

$$F(w) = \mu w^T w + v \left[\frac{1}{n} \sum_{i=1}^n (p_i - a_i)^2 \right] \quad (3)$$

If $(\mu \ll v)$: Network error are generally low.

else if ($\pi \geq v$): Network errors tend to increase, in which case the weight magnitude should be reduced so as to limit errors (Penalty). The system flowchart is presented next:

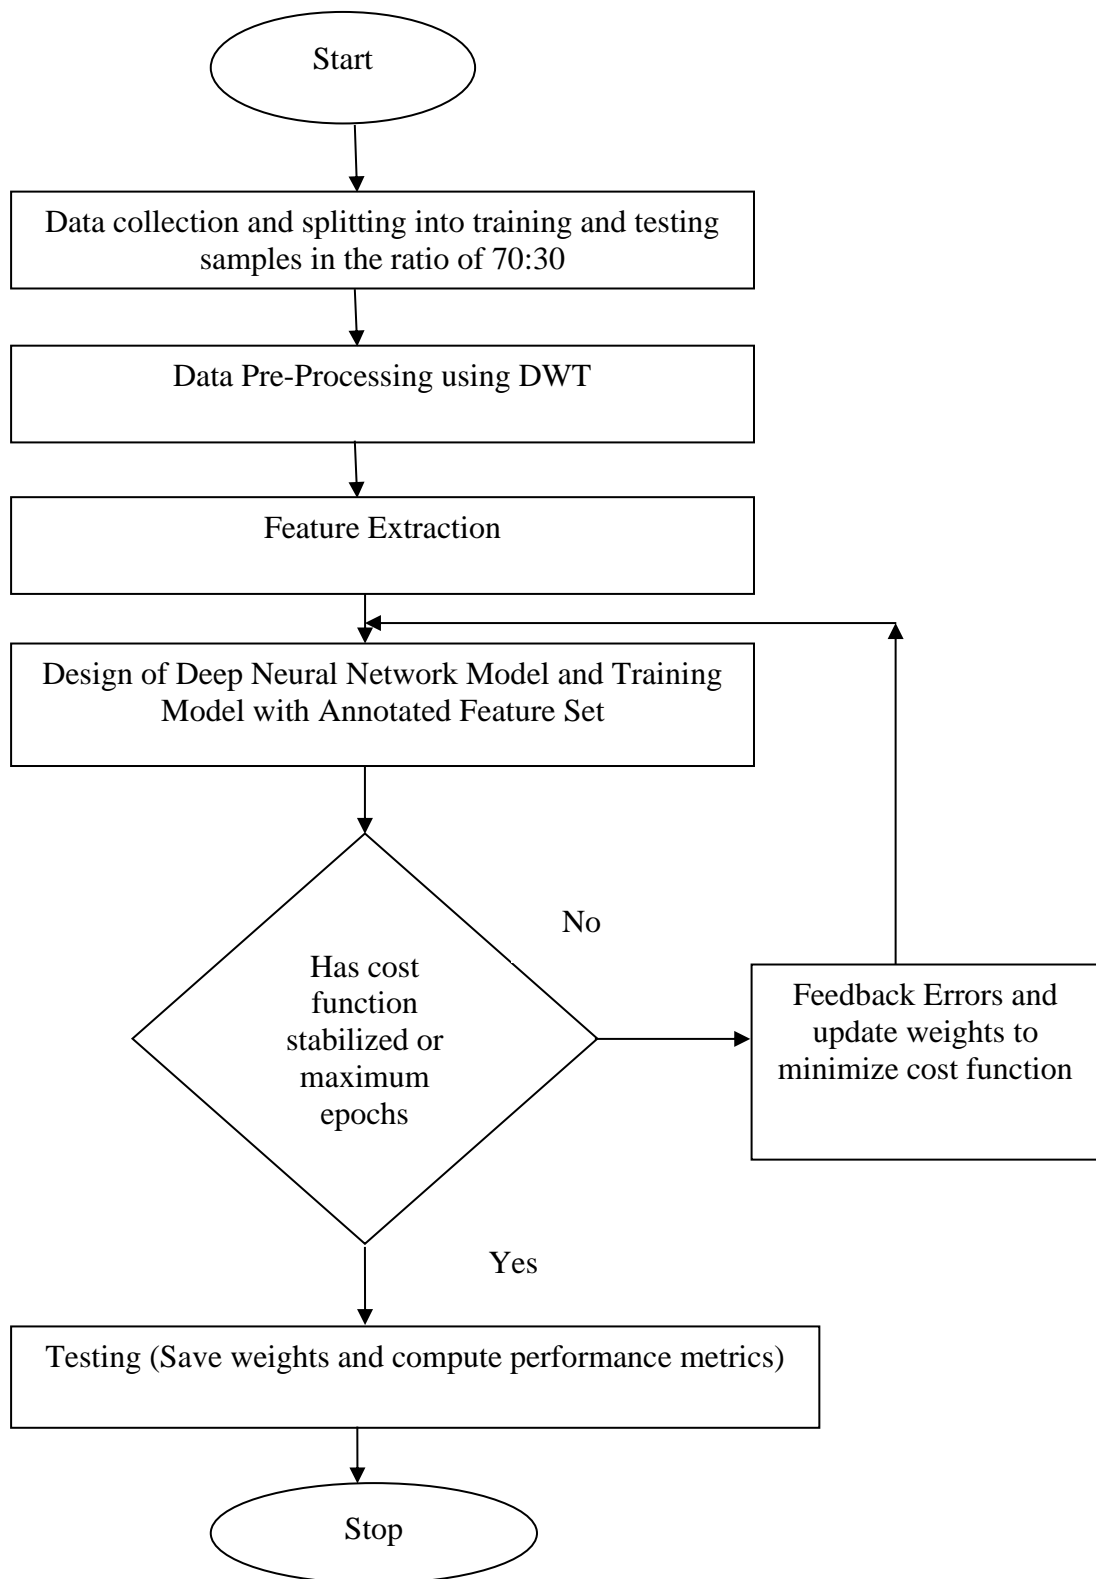


Fig.2 Flowchart of Proposed System

The accuracy of classification is calculated as:

$$Accuracy = \frac{TP+TN}{TP+TN+FP+FN} \quad (4)$$

The next section presents the results associated with the proposed approach.

3. RESULTS

The results obtained are resented in this section sequentially:

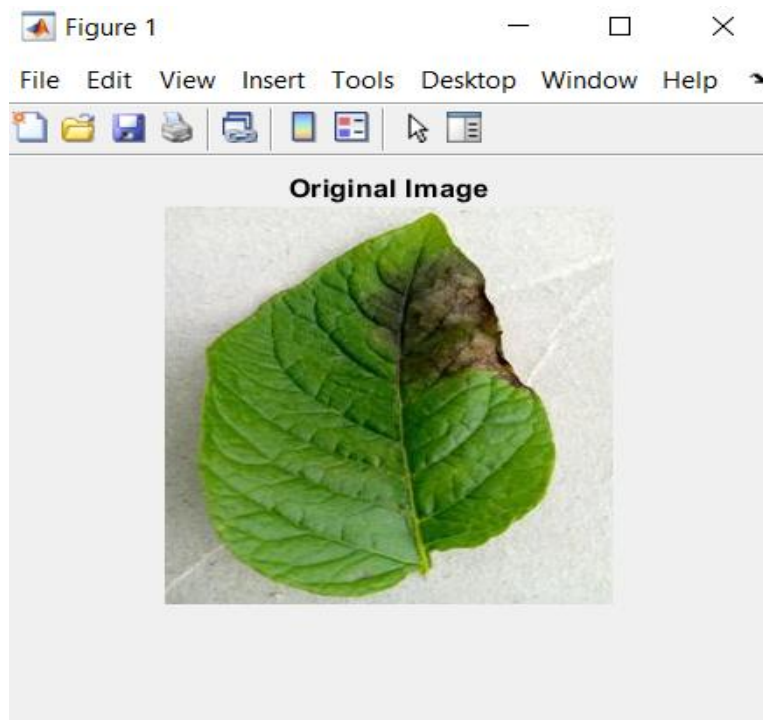


Fig.3 Original Image

Command Window

143	145	142	139	126	126	123	123	125	128	130	131	143	174	211	229	223												
153	152	145	139	128	125	122	121	125	130	133	132	154	186	219	229	223												
135	131	132	135	141	133	130	135	136	136	143	152	156	186	215	225	224												
133	130	131	134	128	137	143	140	135	139	151	161	172	200	225	231	225												
131	130	131	132	123	135	140	136	134	141	152	157	192	215	234	231	223												
131	131	131	130	134	130	127	132	139	146	153	158	207	220	230	226	222												
132	132	131	129	140	128	127	140	146	150	166	187	214	220	223	220	223												
132	131	128	128	126	124	134	145	146	155	185	217	218	222	222	219	225												
129	127	126	126	119	128	136	138	153	181	208	222	218	225	227	222	221												
128	124	123	126	133	139	135	132	164	214	228	212	216	227	233	223	216												
132	132	125	118	137	158	142	138	194	236	229	218	218	223	227	225	224												
136	135	141	152	160	161	152	180	229	236	220	228	220	225	225	224	220												
142	134	146	163	166	173	187	219	246	229	212	230	220	225	224	220	218												
140	129	134	149	167	206	232	234	231	223	217	225	218	222	221	216	216												
130	124	141	163	197	231	247	231	223	229	229	224	215	221	219	214	216												
127	138	177	212	235	230	227	225	228	234	229	220	213	221	220	214	217												
147	174	213	237	239	219	214	222	227	229	226	218	216	224	223	215	219												
171	208	228	228	222	219	224	226	222	228	232	221	219	228	225	216	219												
211	230	225	220	220	224	227	227	227	227	224	218	225	224	223	224	225												
216	221	223	229	218	225	228	226	226	226	221	216	225	227	227	227	227												
221	216	220	226	219	224	227	226	225	225	220	214	225	228	231	230	227												
216	219	220	215	218	224	226	225	225	226	221	217	223	229	231	230	224												
210	224	227	218	218	223	225	223	223	226	225	222	223	227	230	227	221												
214	223	229	226	220	223	223	220	220	224	225	224	222	226	227	225	221												
223	222	225	225	224	224	221	216	215	218	222	221	222	224	225	225	224												
224	223	223	221	228	226	220	213	211	216	219	218	223	223	223	226	228												
235	235	228	218	224	227	226	220	218	223	226	225	226	226	222	217	218												
233	233	227	220	222	222	222	221	220	220	222	224	225	226	223	219	219												
228	228	223	219	223	219	220	226	224	217	218	225	223	224	223	218	218												
222	222	219	217	225	219	221	231	229	218	217	226	220	222	221	217	216												
220	219	218	218	224	218	221	232	229	217	216	225	221	224	224	220	219												

Workspace


Name	Value
	256x256x3 uint8

Fig.4 Reading Pixel Values of Image

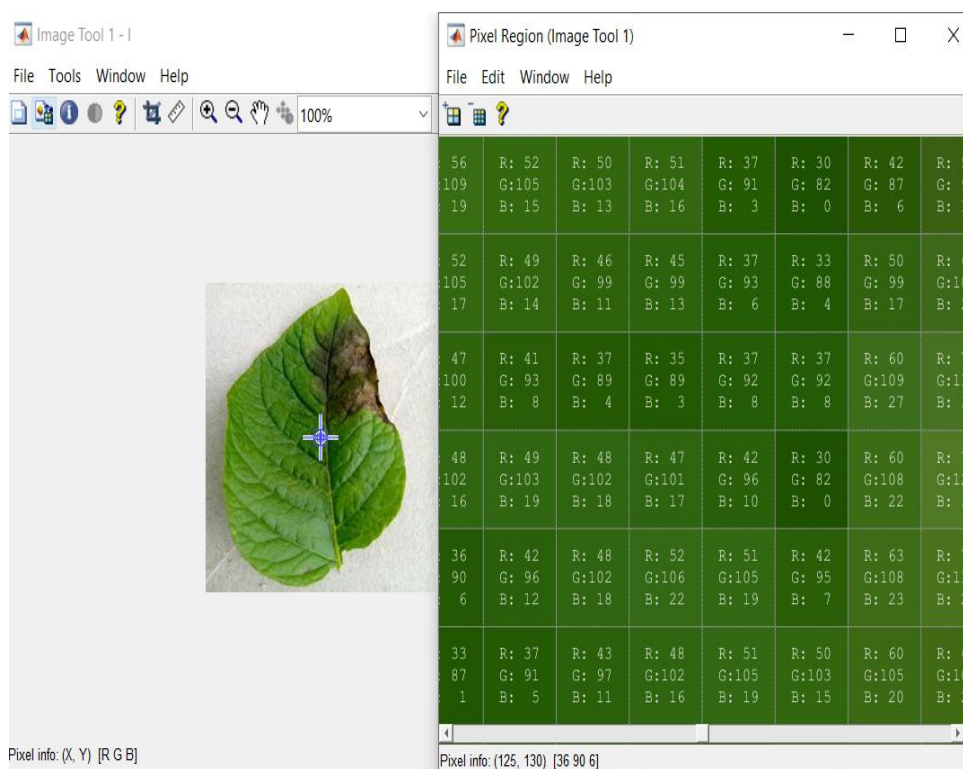


Fig.5 Analysing Pixel Regions

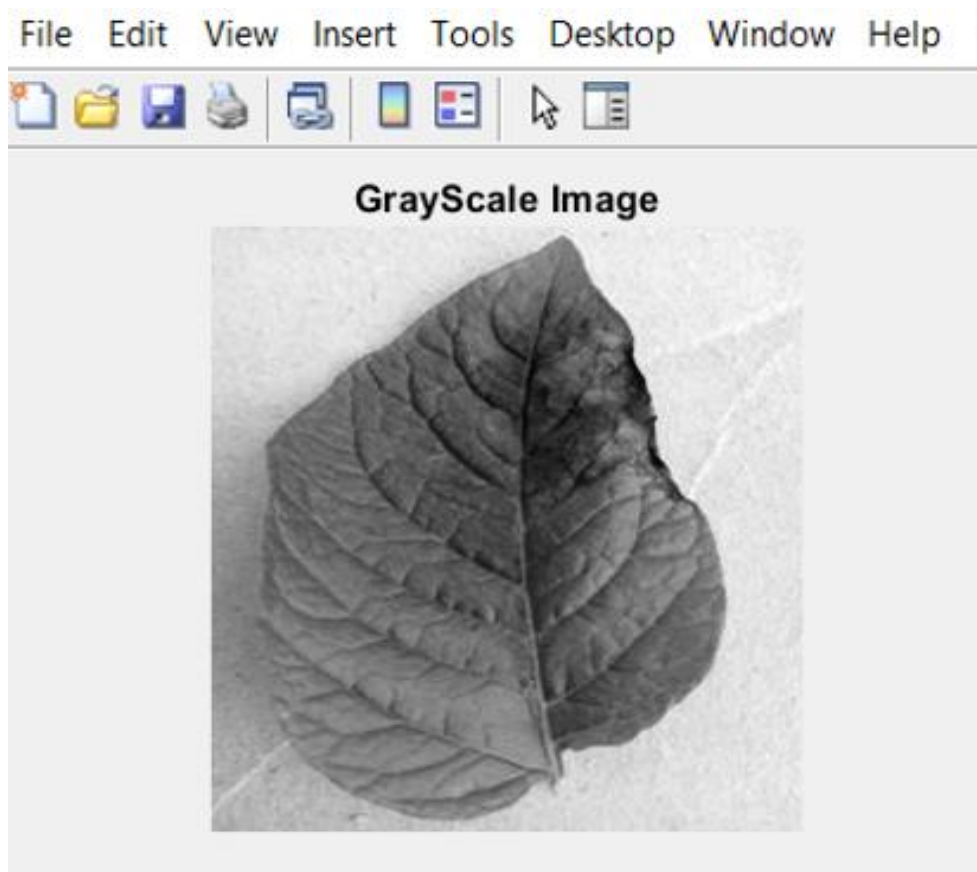


Fig.6 Grayscale Image

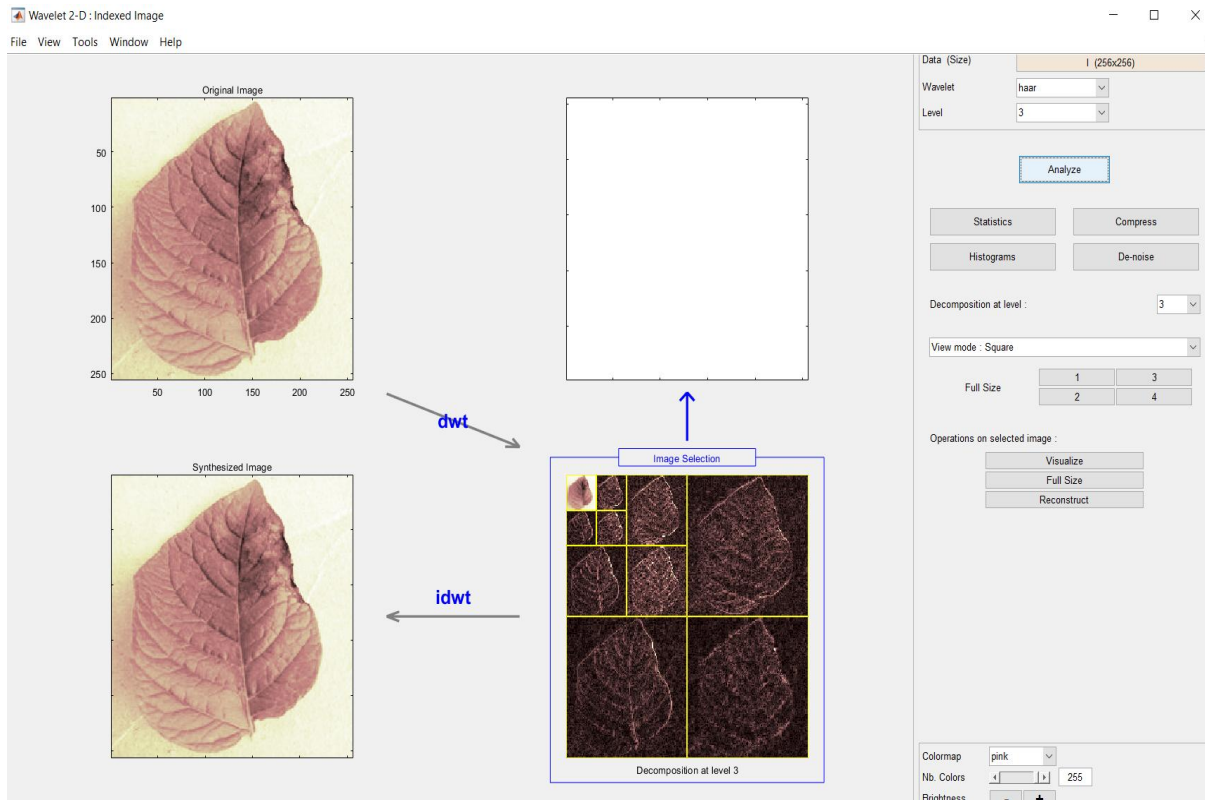


Fig.7 Wavelet Analysis of Image (3rd Level)

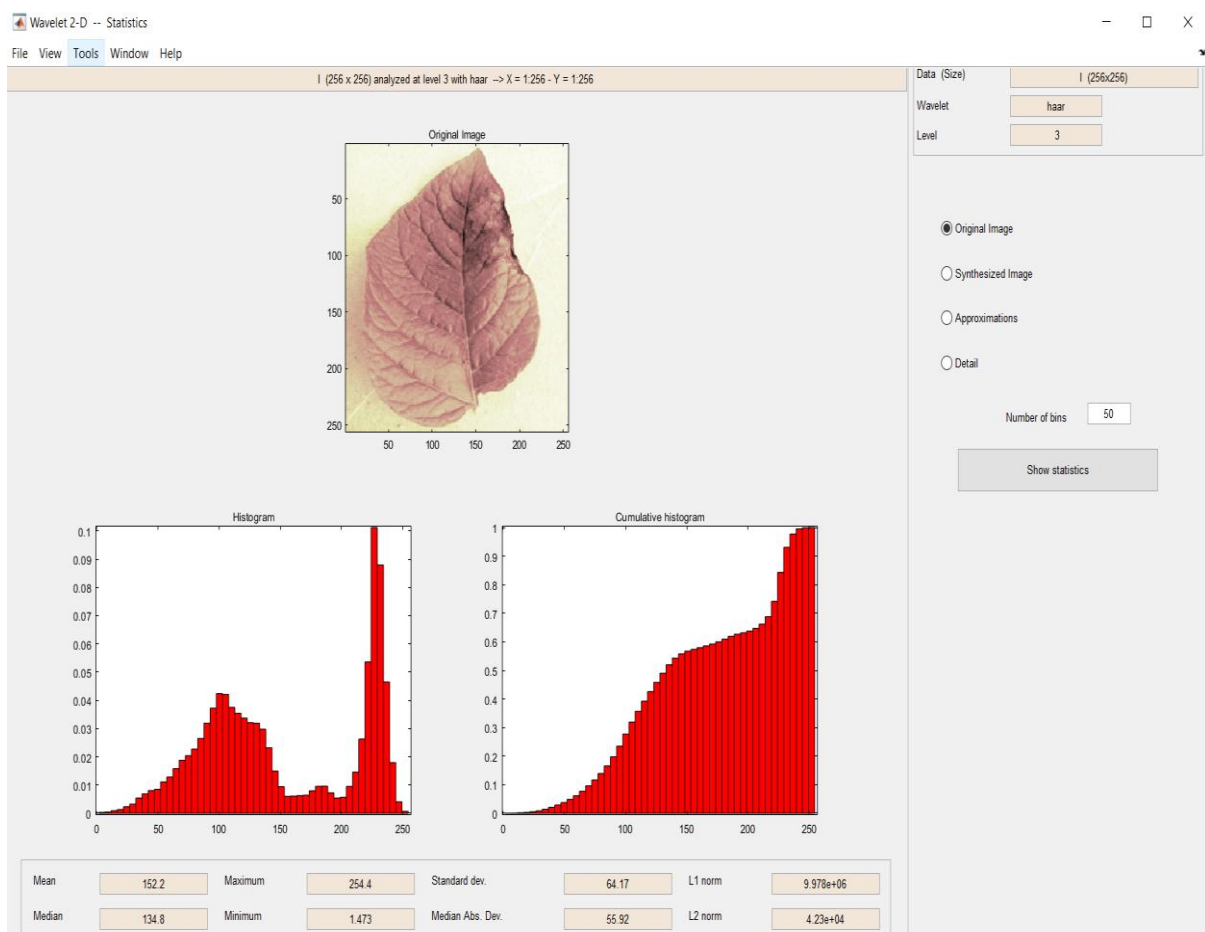


Fig.8 Histogram and Cumulative Histogram of Original Image at 3rd level

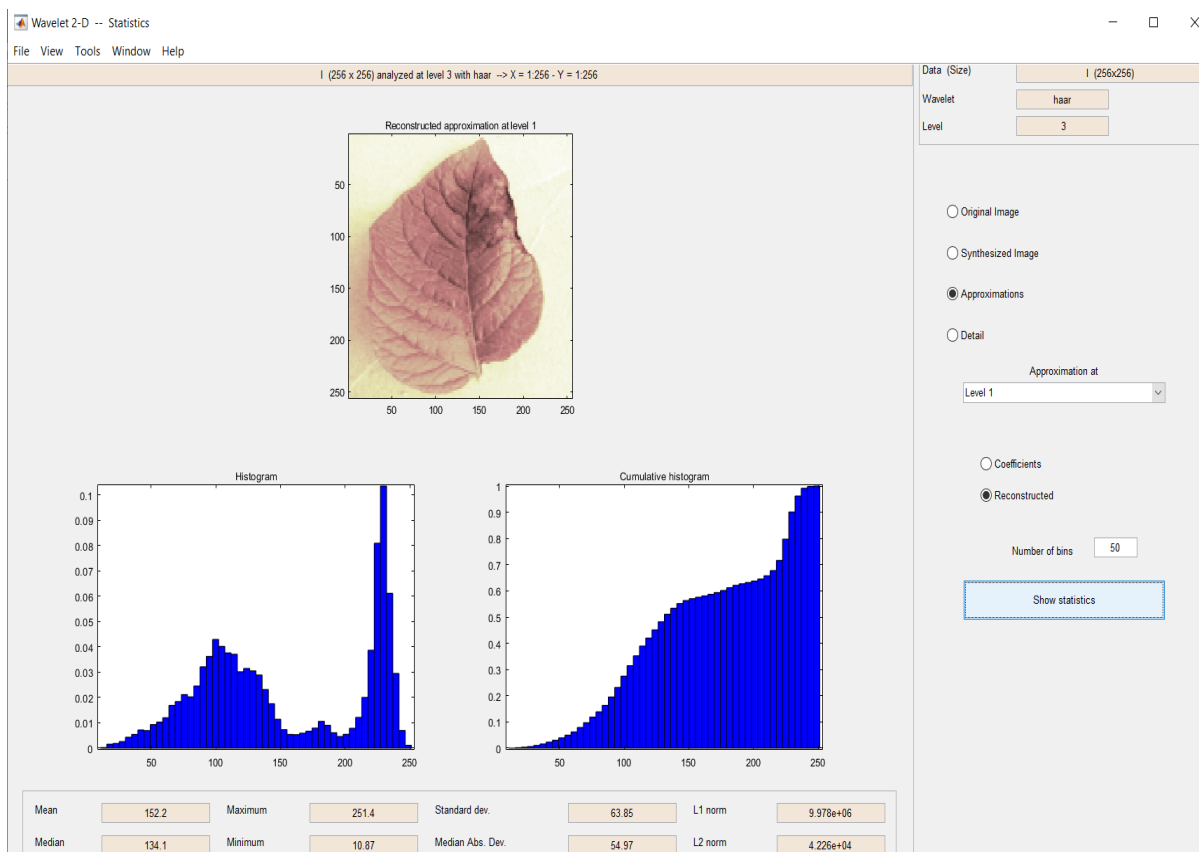


Fig.9 Histogram and Cumulative Histogram of Approximations (3rd Level)

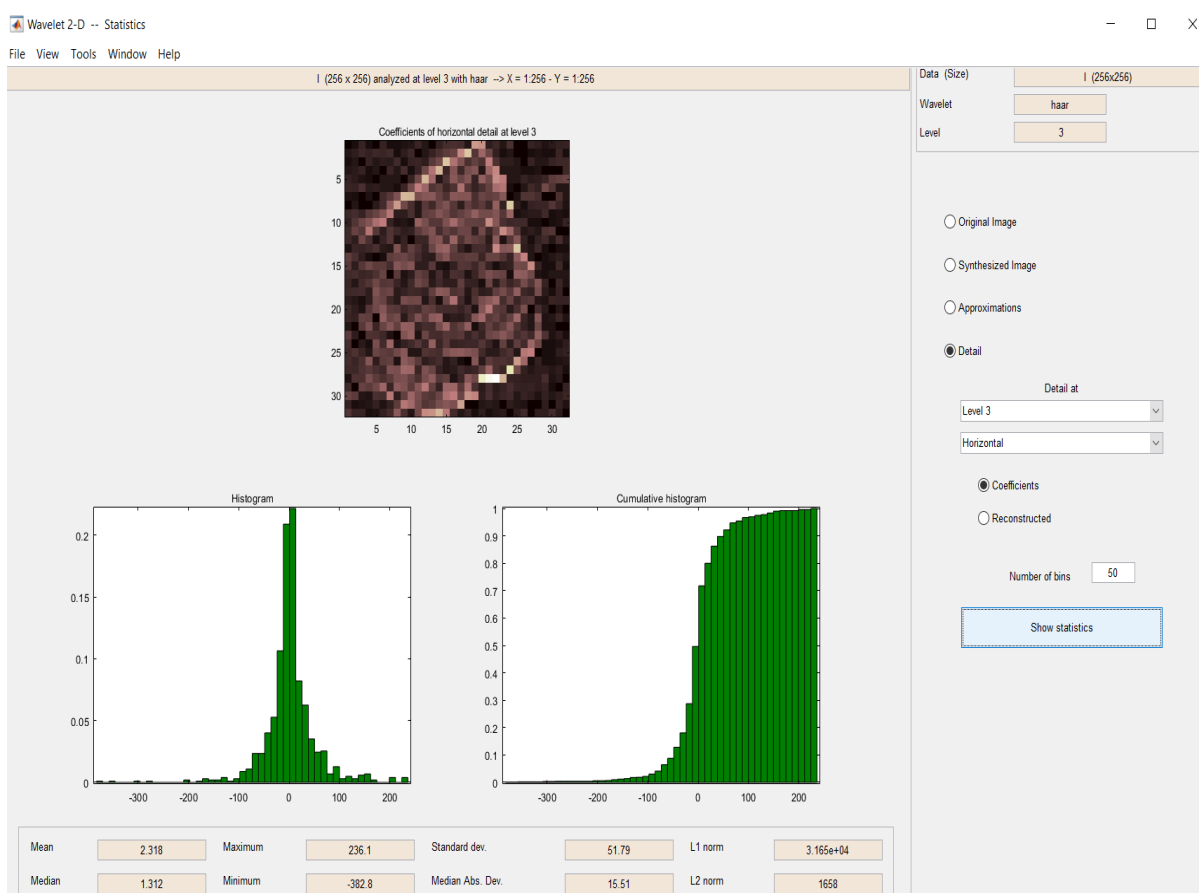


Fig.10 Histogram and Cumulative Histogram of Details at Level 3 of Haarlet

The total number of images for the classification purpose have been considered as 130 (with a 30% testing split for the overall 430 images).

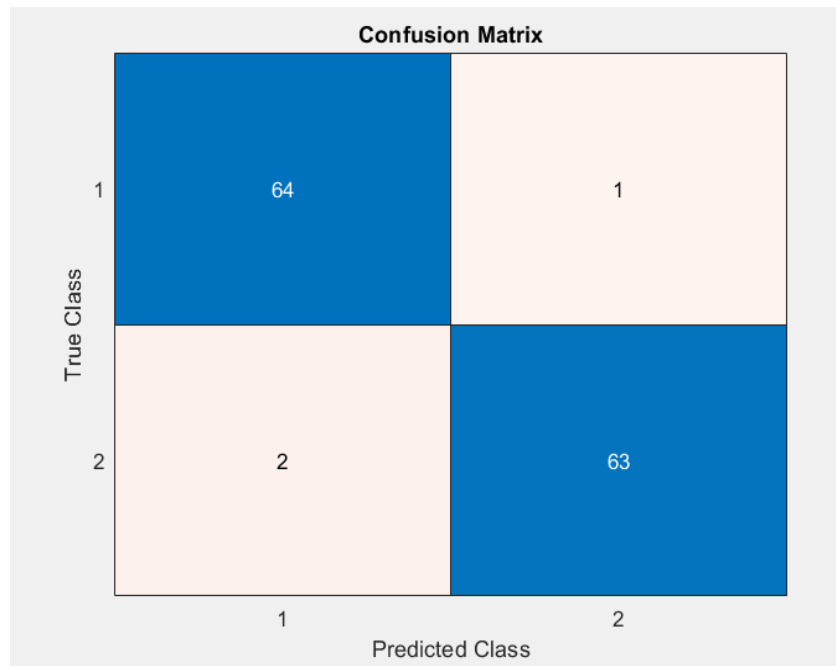


Fig.11 Confusion Matrix

The testing accuracy is computed as:

$$Accuracy = \frac{64 + 63}{64 + 63 + 1 + 2} = 97.69\%$$

The accuracy of the proposed approach is thus 97.69% for the proposed approach.

CONCLUSION:

In conclusion, it can be said that the potato plant (especially the leaf) is prone to blight disease. If left untreated, potato leaf blight, which is brought on by fungi like *Phytophthora infestans*, can seriously harm potato crops all over the world and result in large yield losses. Agronomists' subjective and time-consuming visual inspection is the foundation of traditional disease detection techniques. However, there is a chance to completely transform the identification and treatment of potato leaf blight with the introduction of machine learning (ML) and deep learning (DL) approaches. This paper presents not only a machine learning based approach, but rather integrates it with image denoising and statistical feature extraction to train a deep neural network which attains a classification accuracy of 97.69%.

REFERENCES

- [1] Kodandaram, M. & Saha, Sujoy & Rai, Awadhesh & Naik, Prakash. (2013). Compendium on Pesticide Use in Vegetables.
- [2] Ahmed F, Al-Mamun HA, Bari A, Hossain E, "Classification of crops and weeds from digital images. A support vector machine approach Journal of Crop Production", Elsevier, 2023, vol.40, pp: 98-104.
- [3] Bakhshipour A, Jafari A, Nassiri SM, Zare D, "Weed segmentation using texture features extracted from wavelet sub-images. Biosystems Engineering, "Elsevier 2017, vol.157, pp: 1-12
- [4] Bakhshipour A, Jafari A, "Evaluation of support vector machine and artificial neural networks in weed detection using shape features", Computers and Electronics in Agriculture, Elsevier 2018, vol.145, pp: 153-160

- [5] Fawakherji M., Youssef A., Bloisi D, "Crop and weeds classification for precision agriculture using context-independent pixel-wise segmentation", Proceedings in 2019 Third IEEE International Conference on Robotic Computing (IRC), IEEE 2019, pp: 146-152
- [6] C. C. Bonik, F. Akter, M. H. Rashid and A. Sattar, "A Convolutional Neural Network Based Potato Leaf Diseases Detection Using Sequential Model," 2023 International Conference for Advancement in Technology (ICONAT), Goa, India, 2023, pp. 1-6
- [7] AK Singh, SVN Sreenivasu, U Mahalaxmi, H Sharma, DD Patil, E Asenso, "Hybrid feature-based disease detection in plant leaf using convolutional neural network, bayesian optimized SVM, and random forest classifier", Artificial Intelligence in Food Quality Improvement Hindawi 2022, Article ID 2845320.
- [8] A Singh, H Kaur, "Potato plant leaves disease detection and classification using machine learning methodologies", Proceedings in IOP Conference Series: Materials Science and Engineering, 2022, IOP Conference Series: Materials Science and Engineering, vol. 1022, pp.1-9.
- [9] H Afzaal, AA Farooque, AW Schumann, N Hussain, "Detection of a potato disease (early blight) using artificial intelligence", Remote Sensing, MDPI, 2021, vol.13, pp.1-17.
- [10] M. A. Iqbal and K. H. Talukder, "Detection of Potato Disease Using Image Segmentation and Machine Learning," 2020 International Conference on Wireless Communications Signal Processing and Networking (WiSPNET), Chennai, India, 2020, pp. 43-47.
- [11] D. Tiwari, M. Ashish, N. Gangwar, A. Sharma, S. Patel and S. Bhardwaj, "Potato Leaf Diseases Detection Using Deep Learning," 2020 4th International Conference on Intelligent Computing and Control Systems (ICICCS), Madurai, India, 2020, pp. 461-466
- [12] M. I. Tarik, S. Akter, A. A. Mamun and A. Sattar, "Potato Disease Detection Using Machine Learning," 2021 Third International Conference on Intelligent Communication Technologies and Virtual Mobile Networks (ICICV), Tirunelveli, India, 2021, pp. 800-803.
- [13] J. Akther, M. Harun-Or-Roshid, A. -A. Nayan and M. G. Kibria, "Transfer learning on VGG16 for the Classification of Potato Leaves Infected by Blight Diseases," 2021 Emerging Technology in Computing, Communication and Electronics (ETCCE), Dhaka, Bangladesh, 2021, pp. 1-5
- [14] B Darwin, P Dharmaraj, S Prince, DE Popescu, "Recognition of bloom/yield in crop images using deep learning models for smart agriculture: A review", Agronomy, MDPI 2022, vol.11., no.4, Art No.646.
- [15] E Omrani, B Khoshnevisan, S Shamshirband, "Potential of radial basis function-based support vector regression for apple disease detection", Journal of Measurement, Elsevier 2014, Volume-55, pp. 512-519
- [16] S.Haykin, "Neural Networks and Learning Machines", 3rd Edition, *Pearson Publications*.
- [17] M.Hagan, "Neural Network Design", 2nd Edition, *Cengage Publication*.
- [18] Machine Learning Notes: Stanford University: <http://cs229.stanford.edu/materials.html>